


Eon

Coleção	Eon + Amalgam	
Número Do Produto	4112V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	20 in w x 20 in l	50 cm w x 50 cm l
Dimensões Reais	19.69 in w x 19.69 in l	50.01 cm w x 50.01 cm l
Espessura Da Camada De Uso	22 mil (0.022 in)	0.56 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Loose Lay	
Instalação	Direct Glue Or Perimeter Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	26.91 sq ft	2.5 sq m
Peso Por Caixa	45.86 lbs	20.8 kg

Método De Instalação Recomendado

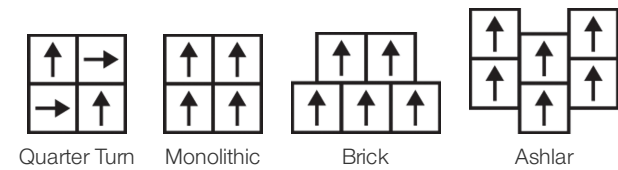

Produtos Coordenados

LVT: Amalgam

desempenho + teste

resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.



Garantias

[15 Anos Comercial Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Total Recycled Content

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
11.59 Kg CO₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate
Health Product Declaration (HPD) | 1000 Ppm Disclosure

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão
Opção 1: cálculos de categoria de produto

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified







[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Rift 12114 LRV 43.9 L* 72.17 V2 - Slight Variation	Strata 12506 LRV 27.4 L* 59.3 V2 - Slight Variation	Epoch 12518 LRV 21.1 L* 53.05 V2 - Slight Variation	Metamorphic 12530 LRV 16.9 L* 48.14 V2 - Slight Variation	Basin 12585 LRV 16.3 L* 47.31 V2 - Slight Variation	Obsidian 12595 LRV 11.3 L* 40.14 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--

