

Tailored


| | | |
|----------------------|--|-------------------------|
| Collection | Tailored | |
| Style Number | 4111V | |
| Construction | Commercial Woven Luxury Vinyl Tile | |
| Class / ASTM F1700 | Class II, Type B | |
| Finish | ExoGuard® | |
| | U.S. | Metric |
| Nominal Dimensions | 9 in w x 36 in l | 23 cm w x 91 cm l |
| Actual Dimensions | 9.00 in w x 36.00 in l | 22.86 cm w x 91.44 cm l |
| Overall Thickness | 0.118 in | 3 mm |
| Edge Profile | Squared Edge | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|-------------------|-----------|-----------|
| Pieces per Carton | 16 pcs | |
| Area per Carton | 36 sq ft | 3.34 sq m |
| Weight per Carton | 37.92 lbs | 17.2 kg |



Recommended Installation Method

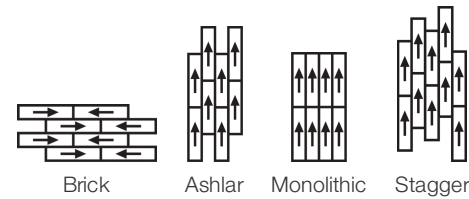

Performance + Testing

| | |
|-------------------------------------|------------------------------|
| Static Load (ASTM F970) | Passes (Modified), *1500 lbs |
| Residual Indentation (ASTM F1914) | Passes |
| Resistance to Heat (ASTM F1514) | Passes |
| Resistance to Light (ASTM F1515) | Passes |
| Resistance to Chemicals (ASTM F925) | Passes |
| Radiant Panel (ASTM E648) | Passes, Class I |

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

| | |
|---|--|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 7.31 Kg CO ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) 3rd Party Certified |
| | Country of Origin Imported |

WELL V2 Contribution Credit


| | |
|--|---|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization | Absence of Halogenated Flame Retardants |
| X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization | FloorScore Certificate |

Leed v4 Contribution Credits

| | |
|---|--|
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | FloorScore Certified |

| | |
|-------------------------|--|
| Installation Guidelines | Please visit www.shawcontract.com for the most current warranty information. |
| Maintenance Guidelines | Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. |
| | This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. |
| | Visit shawcontract.com/testing for more information. |

Available Colorways

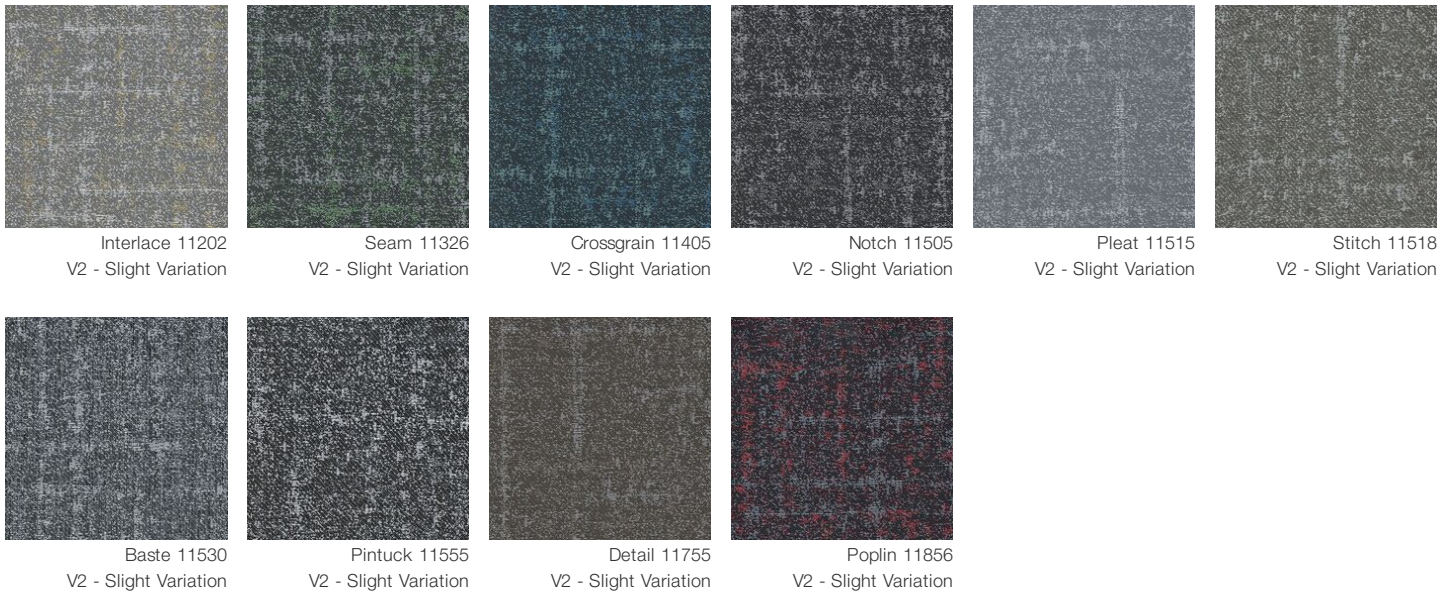

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

