

Terrain II 20 Mil 5 Mm


Collection	Terrain II	
Style Number	4110V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation	Direct Glue	
Recommended Adhesive	S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	20 sq ft	1.86 sq m
Weight per Carton	35.1 lbs	15.92 kg



Recommended Installation Method

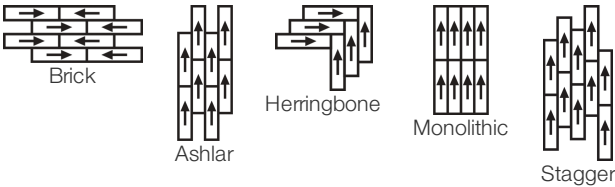

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 12 Mil 2.0

Rigid Core: Terrain II Rigid Core

Performance + Testing

Residual Indentation (ASTM F1914)	Passes
Resistance to Chemicals (ASTM F925)	Passes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [15 Year Commercial Limited Warranty](#)
- [Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	14.9 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	GSA Approved
	Country of Origin United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability .	
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit shawcontract.com/testing for more information.

Available Colorways


					
Satinwood 00140	Willow 00170 V4 - Substantial Variation	Thatch 00173 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210	Saffron 00230 V2 - Slight Variation
					
Prime 00240	Trail 00256 V2 - Slight Variation	Olive 00350 V2 - Slight Variation	Spruce 00360 V2 - Slight Variation	Aqua 00370 V2 - Slight Variation	Azure 00400 V2 - Slight Variation
					
Ink 00450 V2 - Slight Variation	Poplar 00515	Slate 00540 V2 - Slight Variation	Shade 00564 V2 - Slight Variation	Root 00568 V4 - Substantial Variation	Timber 00572 V2 - Slight Variation
					
Graphite 00580 V2 - Slight Variation	Terra 00600 V2 - Slight Variation	Redwood 00650 V2 - Slight Variation	Taun 00660	Pirch 00684 V2 - Slight Variation	Natural 00710 V2 - Slight Variation
					
Lodge 00740 V2 - Slight Variation	Elm 00761	Grove 00769 V3 - Moderate Variation	Nest 00774 V2 - Slight Variation	Echo 00775 V2 - Slight Variation	Cherry 00850 V2 - Slight Variation



Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation