

Abide


| | | |
|----------------------|--|--------------------------|
| Collection | Abide & Inhabit | |
| Style Number | 4107V | |
| Construction | Heavy Commercial Luxury Vinyl Tile | |
| Class / ASTM F1700 | Class III, Type B | |
| Finish | ExoGuard+® | |
| | U.s. | Metric |
| Nominal Dimensions | 7 in w x 47 in l | 18 cm w x 120 cm l |
| Actual Dimensions | 7.09 in w x 47.24 in l | 18.01 cm w x 119.99 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Thickness | 0.098 in | 2.5 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|-------------------|-------------|-----------|
| Pieces Per Carton | 18 pcs | |
| Area Per Carton | 41.85 sq ft | 3.89 sq m |
| Weight Per Carton | 38.64 lbs | 17.53 kg |



Recommended Installation Method

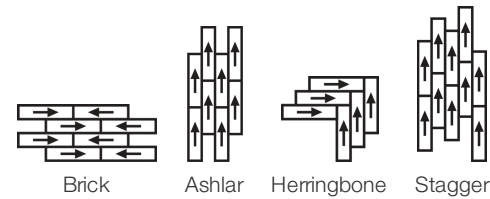

Coordinating Products

Sheet: Inhabit Sheet, Inhabit Plus Sheet

Performance + Testing

| | | |
|--|---|--|
| Static Load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914) | Passes | |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |
| coefficient of friction (ASTM D2407, slip resistance) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes | |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | | |

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)
[15 Year Commercial Limited](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

| | |
|---|--|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 6.05 Kg CO ₂ /M ² |
| Life-Cycle Carbon Emissions | Low Embodied Carbon |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) 3rd Party Certified Country of Origin Imported |
| Global GreenTag International | Phd Health Rate - Platinum Best Environmental Practice Pvc - Version 1.0 |

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants
Ortho-Phthalates
FloorScore Certificate
Health Product Declaration (HPD) | 1000 Ppm Disclosure

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
 Material Ingredients - Option 1: Material Ingredient Reporting
 MR Credit: Building Product Disclosure and Optimization
 Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)
 EQ Credit: Low Emitting Materials
 Option 1: Product Category Calculations

Health Product Declaration (HPD) | 1000 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified


[Installation Guidelines](#)
[Maintenance Guidelines](#)




Please visit www.shawcontract.com for the most current warranty information.
 Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

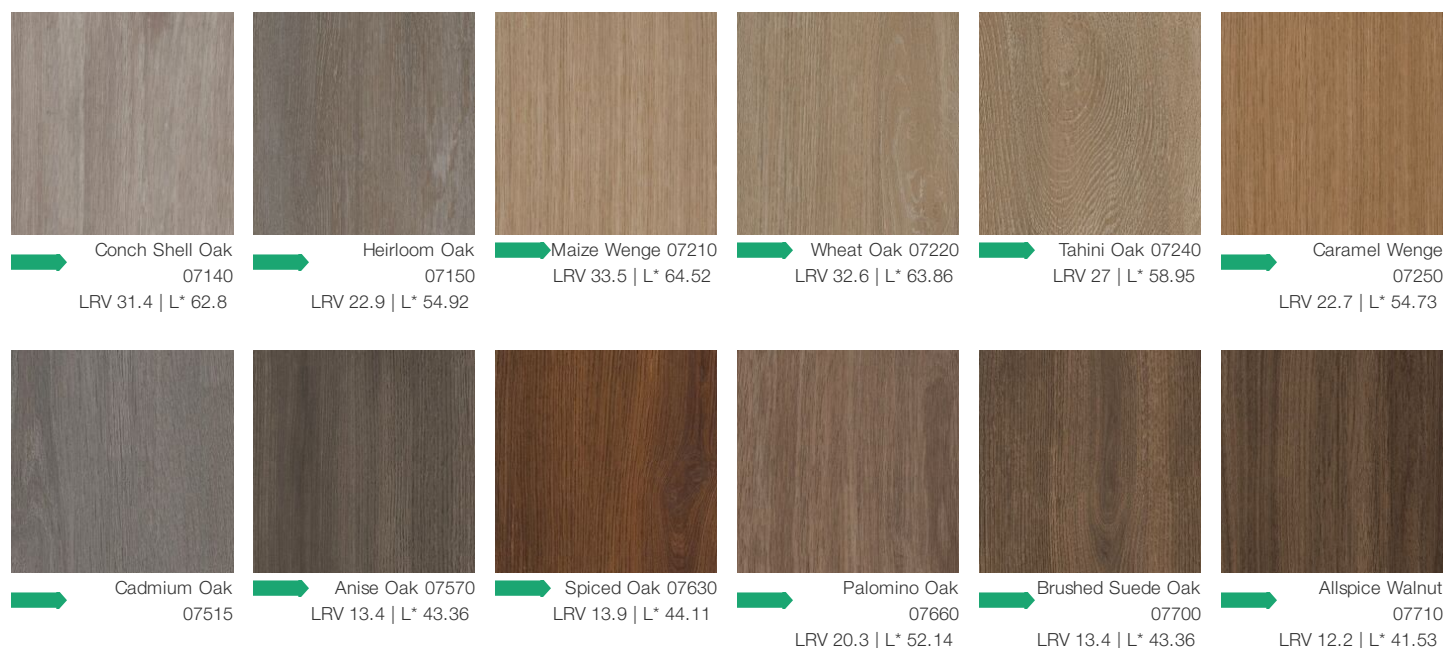Available Colorways



| | | | |
|---|--|--|---|
|  |  |  |  |
| <div><div></div><div>Coriander Oak</div><div>07720</div><div>LRV 20.6 L* 52.5</div></div> | <div><div></div><div>Gabon Wenge</div><div>07730</div><div>LRV 10.9 L* 39.35</div></div> | <div><div></div><div>Chocolate Walnut</div><div>07760</div><div>LRV 9.3 L* 36.48</div></div> | <div><div></div><div>Raw Umber Oak</div><div>07780</div><div>LRV 9.3 L* 36.58</div></div> |

Quick Ship Immediately (In Stock Australia)

