

Abide

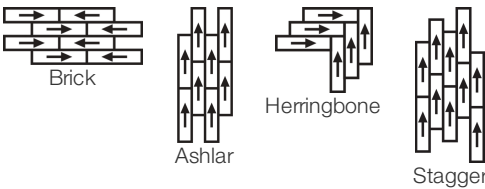
Colección	Abide & Inhabit	
Número De Estilo	4107V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	7 in w x 47 in l	18 cm w x 120 cm l
Dimensiones Reales	7.09 in w x 47.24 in l	18.01 cm w x 119.99 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Embalaje

Piezas Por Caja	18 pcs	
Área Por Caja	41.85 sq ft	3.89 sq m
Peso Por Caja	38.64 lbs	17.53 kg

Método De Instalación Recomendado



Productos Que Combinan

Sheet: Inhabit Sheet

desempeño + pruebas

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	Passes	
resistencia al calor (ASTM F1514)	Passes	
resistencia a la luz (ASTM F1515)	Passes	
resistencia a productos químicos (ASTM F925)	Passes	
panel radiante (ASTM E648)	Passes, Class I	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certificado](#)

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

[Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017](#)  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[CE Marking \(EN 14041\) | Certificado Tercerizado](#)  
[Country of Origin | Imported](#)

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Contribución Para Créditos Leed

















Crédito MR: Divulgación y optimización de productos de construcción  
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales  
Crédito MR: Divulgación y optimización de productos de construcción  
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)  
Crédito EQ: Materiales de baja emisión  
Opción 1: Cálculos de categoría de producto

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
  
**FloorScore® Certified**

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

					
Conch Shell Oak 07140 LRV 31.4   L* 62.8 V3 - Moderate Variation	Heirloom Oak 07150 LRV 22.9   L* 54.92 V3 - Moderate Variation	Maize Wenge 07210 LRV 33.5   L* 64.52 V2 - Slight Variation	Wheat Oak 07220 LRV 32.6   L* 63.86 V3 - Moderate Variation	Tahini Oak 07240 LRV 27   L* 58.95 V3 - Moderate Variation	Caramel Wenge 07250 LRV 22.7   L* 54.73 V2 - Slight Variation
					
Cadmium Oak 07515 V3 - Moderate Variation	Anise Oak 07570 LRV 13.4   L* 43.36 V4 - Substantial Variation	Spiced Oak 07630 LRV 13.9   L* 44.11 V4 - Substantial Variation	Palomino Oak 07660 LRV 20.3   L* 52.14 V3 - Moderate Variation	Brushed Suede Oak 07700 LRV 13.4   L* 43.36 V4 - Substantial Variation	Allspice Walnut 07710 LRV 12.2   L* 41.53 V3 - Moderate Variation
					
Coriander Oak 07720 LRV 20.6   L* 52.5 V3 - Moderate Variation	Gabon Wenge 07730 LRV 10.9   L* 39.35 V2 - Slight Variation	Chocolate Walnut 07760 LRV 9.3   L* 36.48 V3 - Moderate Variation	Raw Umber Oak 07780 LRV 9.3   L* 36.58 V3 - Moderate Variation		

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

