


Abide

Colección	Abide & Inhabit	
Número De Estilo	4107V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	7 in w x 47 in l	18 cm w x 120 cm l
Dimensiones Reales	7.09 in w x 47.24 in l	18.01 cm w x 119.99 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	18 pcs	
Área Por Caja	41.85 sq ft	3.89 sq m
Peso Por Caja	38.64 lbs	17.53 kg

Método De Instalación Recomendado

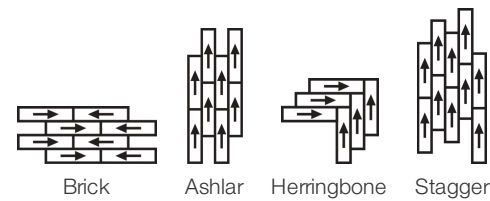

Productos Que Combinan

Sheet: Inhabit Sheet



desempeño + pruebas

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	Passes	
resistencia al calor (ASTM F1514)	Passes	
resistencia a la luz (ASTM F1515)	Passes	
resistencia a productos químicos (ASTM F925)	Passes	
panel radiante (ASTM E648)	Passes, Class I	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw’s diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	6.05 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041) Certificado Tercerizado
	Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore® Certificate****Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
 Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción
 Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión
 Opción 1: Cálculos de categoría de producto


[Installation Guidelines](#)[Maintenance Guidelines](#)**Health Product Declaration (HPD) | 1000 Ppm Disclosure****3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore® Certified**

Please visit www.shawcontract.com for the most current warranty information.
 Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
 *****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.


Available Colorways



Conch Shell Oak 07140
 LRV 31.4 | L* 62.8
 V3 - Moderate Variation



Heirloom Oak 07150
 LRV 22.9 | L* 54.92
 V3 - Moderate Variation




Maize Wenge 07210
 LRV 33.5 | L* 64.52
 V2 - Slight Variation



Wheat Oak 07220
 LRV 32.6 | L* 63.86
 V3 - Moderate Variation




Tahini Oak 07240
 LRV 27 | L* 58.95
 V3 - Moderate Variation



Caramel Wenge 07250
 LRV 22.7 | L* 54.73
 V2 - Slight Variation



Cadmium Oak 07515
 V3 - Moderate Variation



Anise Oak 07570
 LRV 13.4 | L* 43.36
 V4 - Substantial Variation




Spiced Oak 07630
 LRV 13.9 | L* 44.11
 V4 - Substantial Variation



Palomino Oak 07660
 LRV 20.3 | L* 52.14
 V3 - Moderate Variation



Brushed Suede Oak 07700
 LRV 13.4 | L* 43.36
 V4 - Substantial Variation



Allspice Walnut 07710
 LRV 12.2 | L* 41.53
 V3 - Moderate Variation

			
Coriander Oak 07720 LRV 20.6 L* 52.5 V3 - Moderate Variation	Gabon Wenge 07730 LRV 10.9 L* 39.35 V2 - Slight Variation	Chocolate Walnut 07760 LRV 9.3 L* 36.48 V3 - Moderate Variation	Raw Umber Oak 07780 LRV 9.3 L* 36.58 V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

