

Abide

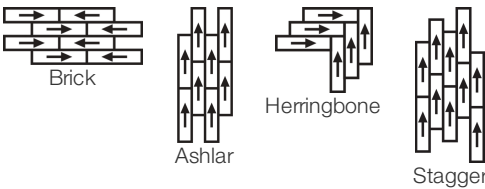
Collection	Abide & Inhabit	
Numéro De Style	4107V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	7 in w x 47 in l	18 cm w x 120 cm l
Dimensions Réelles	7.09 in w x 47.24 in l	18.01 cm w x 119.99 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	18 pcs	
Surface Par Carton	41.85 sq ft	3.89 sq m
Poids Par Carton	38.64 lbs	17.53 kg

Méthodes d'Installation Conseillées



Coordination Des Produits

Sheet: Inhabit Sheet

performance + Tests et essai

charge statique (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
poinçonnement rémanent (ASTM F1914)		
résistance à la chaleur (ASTM F1514)		
résistance à la lumière (ASTM F1515)		
résistance chimique (ASTM F925)		
Essai au panneau radiant (Astm E648)	Passes, Class I	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
coefficient de frottement (ASTM D2407, résistance au glissement)		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garanties

[Limitée Commerciale De 15 Ans](#)

[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)
[FloorScore® | Agréé](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Life-Cycle Carbon Emissions
Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)
6.05 Kg CO₂/M²
Low Embodied Carbon
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts

Absence of Asbestos
Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction
« Crédit MR : Divulgation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)

[Maintenance Guidelines](#)

















Health Product Declaration (HPD) | 1000 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Conch Shell Oak 07140 LRV 31.4 L* 62.8 V3 - Moderate Variation	Heirloom Oak 07150 LRV 22.9 L* 54.92 V3 - Moderate Variation	Maize Wenge 07210 LRV 33.5 L* 64.52 V2 - Slight Variation	Wheat Oak 07220 LRV 32.6 L* 63.86 V3 - Moderate Variation	Tahini Oak 07240 LRV 27 L* 58.95 V3 - Moderate Variation	Caramel Wenge 07250 LRV 22.7 L* 54.73 V2 - Slight Variation
					
Cadmium Oak 07515 V3 - Moderate Variation	Anise Oak 07570 LRV 13.4 L* 43.36 V4 - Substantial Variation	Spiced Oak 07630 LRV 13.9 L* 44.11 V4 - Substantial Variation	Palomino Oak 07660 LRV 20.3 L* 52.14 V3 - Moderate Variation	Brushed Suede Oak 07700 LRV 13.4 L* 43.36 V4 - Substantial Variation	Allspice Walnut 07710 LRV 12.2 L* 41.53 V3 - Moderate Variation
					
Coriander Oak 07720 LRV 20.6 L* 52.5 V3 - Moderate Variation	Gabon Wenge 07730 LRV 10.9 L* 39.35 V2 - Slight Variation	Chocolate Walnut 07760 LRV 9.3 L* 36.48 V3 - Moderate Variation	Raw Umber Oak 07780 LRV 9.3 L* 36.58 V3 - Moderate Variation		

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

