

Thoughtful


| | | |
|---------------------------|---|-------------------------|
| Collection | Creating Space | |
| Style Number | 4122V | |
| Construction | Heavy Commercial Luxury Vinyl Tile | |
| class | Class III, Type B | |
| Finish | ExoGuard+® | |
| | U.s. | Metric |
| Nominal Dimensions | 24 in w x 24 in l | 60 cm w x 60 cm l |
| Actual Dimensions | 23.62 in w x 23.62 in l | 59.99 cm w x 59.99 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Product Thickness | 0.197 in | 5 mm |
| Edge Profile | Squared Edge | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 | |



Packaging

| | | |
|----------------|-------------|-----------|
| Pieces Per Box | 6 pcs | |
| Area Per Box | 23.25 sq ft | 2.16 sq m |
| Weight Per Box | 51.929 lbs | 23.55 kg |

Recommended Installation Method

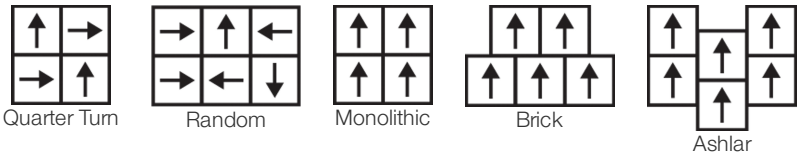

Coordinating Products

LVT: Kind
Carpet Tile: Aware Tile, Conscious Tile, Intention Tile, Present Tile, Aware Ecologix® Tile

performance + testing

| | |
|---|---|
| residual indentation (ASTM F1914) | Passes |
| resistance to heat (ASTM F1514) | Passes |
| resistance to light (ASTM F1515) | Passes |
| resistance to chemicals (ASTM F925) | Passes |
| radiant panel (ASTM E648) | Passes, Class I |
| coefficient of friction (ASTM D2407, slip resistance) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Life-Cycle Carbon Emissions
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
6.05 Kg CO₂/M²
Low Embodied Carbon
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified


[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Gesture 22100
V2 - Slight Variation




Vellum 22103
LRV 47.3 | L* 74.36
V2 - Slight Variation




Chalk 22111
V2 - Slight Variation




Jade 22405
V2 - Slight Variation




Indigo 22429
V2 - Slight Variation



Crisp 22518
V2 - Slight Variation



Warmth 22530
V2 - Slight Variation



Charcoal 22585
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

