

Thoughtful


Coleção	Creating Space	
Número Do Produto	4122V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe	Class III, Type B	
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	24 in w x 24 in l	60 cm w x 60 cm l
Dimensões Reais	23.62 in w x 23.62 in l	59.99 cm w x 59.99 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Instalação	Direct Glue	
Adesivo Recomendado	S150 Resilient Sheet Spray 1 Can, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151	

Empacotamento

Peças Por Caixa	6 pcs	
Área Por Caixa	23.25 sq ft	2.16 sq m
Peso Por Caixa	51.929 lbs	23.55 kg



Método De Instalação Recomendado

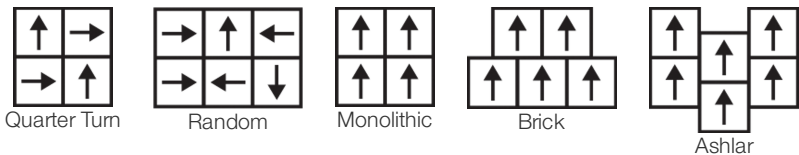

Produtos Coordenados

LVT: Kind  
Carpet Tile: Aware Tile, Conscious Tile, Intention Tile, Present Tile, Aware Ecologix® Tile

desempenho + teste

recuo residual (ASTM F1914)	Passes
resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certificado](#)

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

[CE Marking \(EN 14041\) | Certificado 3rd Party](#)  
[Country of Origin | Imported](#)

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

Crédito De Contribuição


MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais  
MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)  
Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**


[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways




Gesture 22100  
V2 - Slight Variation




Vellum 22103  
LRV 47.3 | L\* 74.36  
V2 - Slight Variation




Chalk 22111  
V2 - Slight Variation




Jade 22405  
V2 - Slight Variation




Indigo 22429  
V2 - Slight Variation



Crisp 22518  
V2 - Slight Variation



Warmth 22530  
V2 - Slight Variation



Charcoal 22585  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

