

Kind


Collection	Creating Space	
Numéro De Style	4123V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	24 in w x 24 in l	60 cm w x 60 cm l
Dimensions Réelles	23.62 in w x 23.62 in l	59.99 cm w x 59.99 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation	Direct Glue	
Adhésif Recommandé	4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151	



Emballage

Pièces Par Carton	6 pcs	
Surface Par Carton	23.25 sq ft	2.16 sq m
Poids Par Carton	51.929 lbs	23.55 kg

Méthodes d'Installation Conseillées

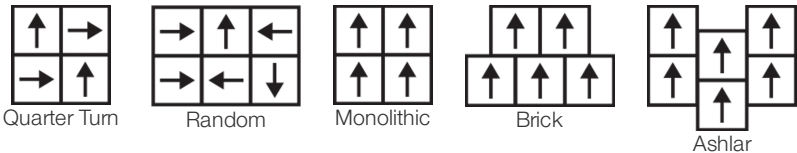

Coordination Des Produits

LVT: Thoughtful
Carpet Tile: Aware Tile, Conscious Tile, Intention Tile, Present Tile, Aware Ecologix® Tile

performance + Tests et essai

poingonnement rémanent (ASTM F1914)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Commercial 15 Year Underbed Bond Warranty](#)

[Limitée Commerciale De 15 Ans](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

[FloorScore® | Agréé](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)

6.05 Kg CO₂/M²

Low Embodied Carbon

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

Absence of Heavy Metals

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

Absence of Halogenated Flame Retardants

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

Ortho-Phthalates

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

FloorScore Certificate

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgence et optimisation des produits de construction

Health Product Declaration (HPD) | 100 Ppm Disclosure

« Crédit MR : Divulgence et optimisation des produits de construction

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Crédit EQ : matériaux faibles émissions

FloorScore Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)


Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Vellum 23103
V2 - Slight Variation




Reed 23155
V2 - Slight Variation




Natural 23504
V2 - Slight Variation



Crisp 23518
V2 - Slight Variation



Slate 23520
LRV 32.5 | L* 63.73
V2 - Slight Variation




Charcoal 23585
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation