


Terrain II Rigid Core


Collection	Terrain II	
Numéro De Style	4125V	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	7 in w x 48 in l	18 cm w x 122 cm l
Dimensions Réelles	7.00 in w x 48.00 in l	17.78 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.157 in	4 mm
Profil Du Bord	Micro-Biseau	
Installation Type	InLine Level Edge	
Installation	Direct Glue	
Adhésif Recommandé	4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	

Emballage

Surface Par Carton	27.96 sq ft	2.6 sq m
Poids Par Carton	42.24 lbs	19.16 kg

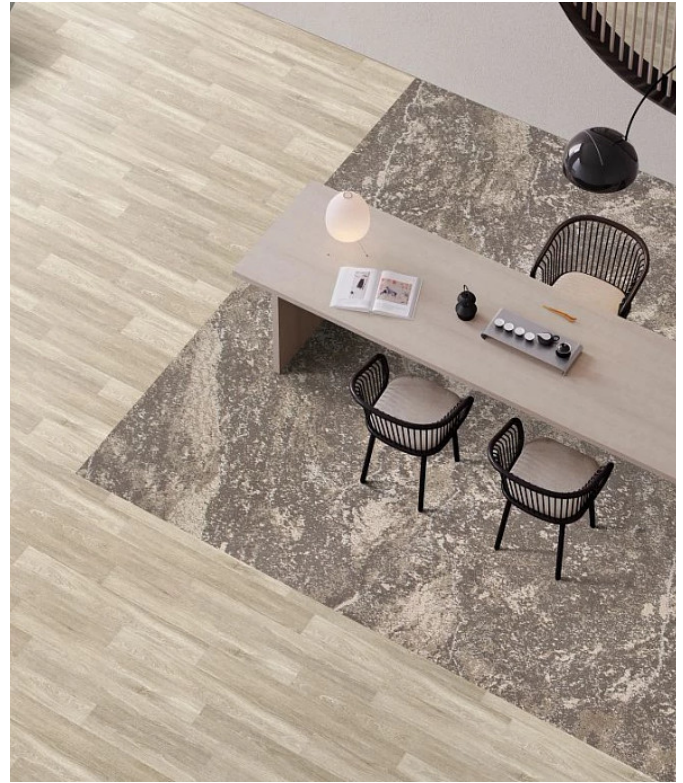

Méthodes d'Installation Conseillées



Coordination Des Produits

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm, Terrain II 12 Mil 2.0

performance + Tests et essai

poinçonnement rémanent (ASTM F1914)	Passes
Flexibility (ASTM F137)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Garanties

[Commercial 15 Year Underbed Bond Warranty](#)
[Limitée Commerciale De 15 Ans](#)

Attributs + Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Agréé
Climate Impact	
Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017
Embodied Carbon (Cradle to Gate)	12.1 Kg Co ₂ /M ²
Total Recycled Content	20% (Pre-Consumer 20% Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer. CE Marking (EN 14041) Certifié Par Un Tiers Country of Origin United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt	Absence of Heavy Metals
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt	Absence of Halogenated Flame Retardants
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt	Ortho-Phthalates
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt	FloorScore Certificate
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgateion et optimisation des produits de construction
« Crédit MR : Divulgateion et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

Health Product Declaration (HPD) | 100 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Willow 00170
V3 - Moderate Variation



Thatch 00173
V2 - Slight Variation



Ash 00174
V3 - Moderate Variation



Saffron 00230
V2 - Slight Variation




Trail 00256
V2 - Slight Variation




Olive 00350
V2 - Slight Variation



Spruce 00360
V2 - Slight Variation



Aqua 00370
V2 - Slight Variation



Azure 00400
V2 - Slight Variation




Ink 00450
V2 - Slight Variation




Slate 00540
V2 - Slight Variation




Shade 00564
V2 - Slight Variation




Root 00568
V4 - Substantial Variation




Timber 00572
V2 - Slight Variation



Graphite 00580
V2 - Slight Variation



Terra 00600
V2 - Slight Variation



Redwood 00650
V2 - Slight Variation



Pirch 00684
V2 - Slight Variation



Natural 00710
V2 - Slight Variation



Lodge 00740
V2 - Slight Variation




Grove 00769
V3 - Moderate Variation



Nest 00774
V2 - Slight Variation



Echo 00775
V2 - Slight Variation



Cherry 00850
V2 - Slight Variation



Violet 00965
V2 - Slight Variation



Summit 05012
V3 - Moderate Variation



Orchard 05013
V2 - Slight Variation



Lark 05016
V3 - Moderate Variation



Aspen 05019
V4 - Substantial Variation



Sequoia 07003
V2 - Slight Variation



Sumac 07004
V3 - Moderate Variation



Alder 07005
V2 - Slight Variation



Thicket 07008
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

