

Terrain II Rigid Core


| | | |
|--------------------------------|---|--------------------------|
| Collection | Terrain II | |
| Numéro De Style | 4125V | |
| classe | Class III, Type B | |
| Finition | ExoGuard+® | |
| | Impérial | Métrique |
| Dimensions Nominales | 7 in w x 48 in l | 18 cm w x 122 cm l |
| Dimensions Réelles | 7.00 in w x 48.00 in l | 17.78 cm w x 121.92 cm l |
| Épaisseur De La Couche d'Usure | 20 mil (0.02 in) | 0.51 mm |
| Épaisseur Générale Du Produit | 0.157 in | 4 mm |
| Profil Du Bord | Micro-Biseau | |
| Installation Type | InLine Level Edge | |
| Installation | Direct Glue | |
| Adhésif Recommandé | , 4200 Resilient Tile 4 Gallon, 4200 Resilient Sheet 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , or 4151 Multi-Use Premium 4 Gallon | |

Emballage

| | | |
|--------------------|-------------|----------|
| Surface Par Carton | 27.96 sq ft | 2.6 sq m |
| Poids Par Carton | 42.24 lbs | 19.16 kg |



Méthodes d'Installation Conseillées



Coordination Des Produits

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 12 Mil 2.0, Terrain II 20 Mil 5 Mm

Performance + Tests Et Essai

| | |
|--|---|
| Poinçonnement Rémanent (Astm F1914) | Passes |
| Souplesse (Astm F137) | Passes |
| Résistance À La Chaleur (Astm F1514) | Passes |
| Résistance À La Lumière (Astm F1515) | Passes |
| Résistance Chimique (Astm F925) | Passes |
| Essai Au Panneau Radiant (Astm E648) | Passes, Class I |
| Coefficient De Frottement (Astm D2407, Résistance Au Glissement) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garanties

- Limitée Commerciale De 15 Ans
- Commercial 15 Year Underbed Bond Warranty

Attributs + Certifications

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Agréé |
| Climate Impact | |
| Environmental Product Declaration (EPD) | Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017 |
| Total Recycled Content | 20% (Pre-Consumer 20% Post-Consumer 0%) |
| Global Product Assessment | Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer. |
| | CE Marking (EN 14041) Certifié Par Un Tiers |
| | Country of Origin United States |

WELL V2 Contribution Credit

| | |
|---|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt | Absence of Heavy Metals |
| X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt | Absence of Halogenated Flame Retardants |
| Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt | Ortho-Phthalates |
| X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt | FloorScore Certificate |
| X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgateion et optimisation des produits de construction
« Crédit MR : Divulgateion et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

Health Product Declaration (HPD) | 100 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)
[Maintenance Guidelines](#)



















Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|--|--|---|---|---|
|  Willow 00170 V3 - Moderate Variation |  Thatch 00173 V2 - Slight Variation |  Ash 00174 V3 - Moderate Variation |  Saffron 00230 V2 - Slight Variation |  Trail 00256 V2 - Slight Variation |  Olive 00350 V2 - Slight Variation |
|  Spruce 00360 V2 - Slight Variation |  Aqua 00370 V2 - Slight Variation |  Azure 00400 V2 - Slight Variation |  Ink 00450 V2 - Slight Variation |  Slate 00540 V2 - Slight Variation |  Shade 00564 V2 - Slight Variation |
|  Root 00568 V4 - Substantial Variation |  Timber 00572 V2 - Slight Variation |  Graphite 00580 V2 - Slight Variation |  Terra 00600 V2 - Slight Variation |  Redwood 00650 V2 - Slight Variation |  Birch 00684 V2 - Slight Variation |

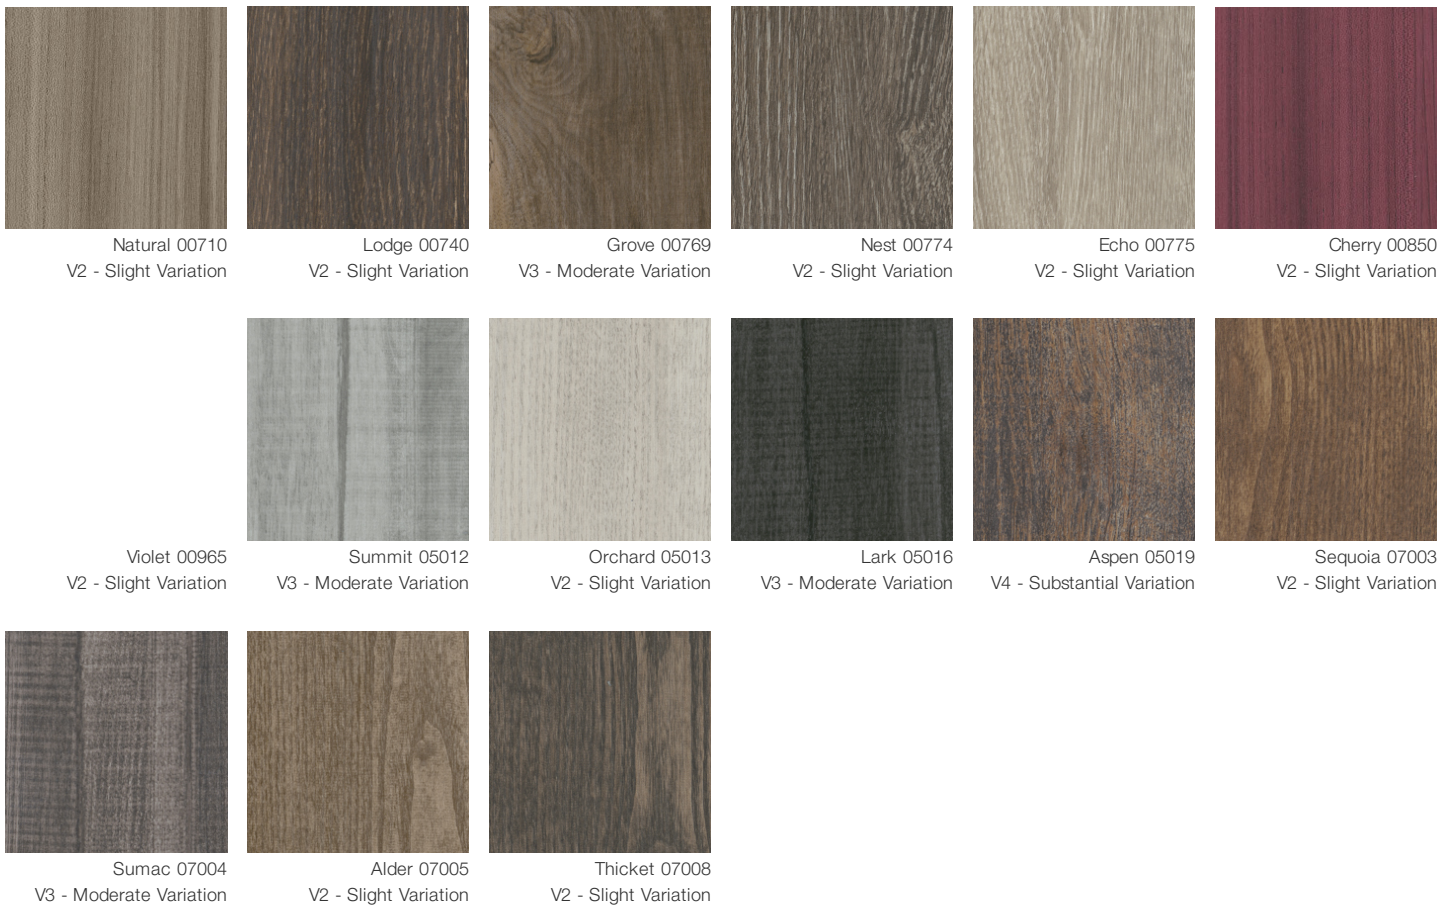

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

