


## Mindset Lvt


Collection	<b>Set Up</b>	
Style Number	<b>4124V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>12 in w x 24 in l</b>	<b>30 cm w x 61 cm l</b>
Actual Dimensions	<b>12.00 in w x 24.00 in l</b>	<b>30.48 cm w x 60.96 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

### Packaging

Pieces per Carton	<b>18 pcs</b>	
Area per Carton	<b>36 sq ft</b>	<b>3.34 sq m</b>
Weight per Carton	<b>32.4 lbs</b>	<b>14.7 kg</b>

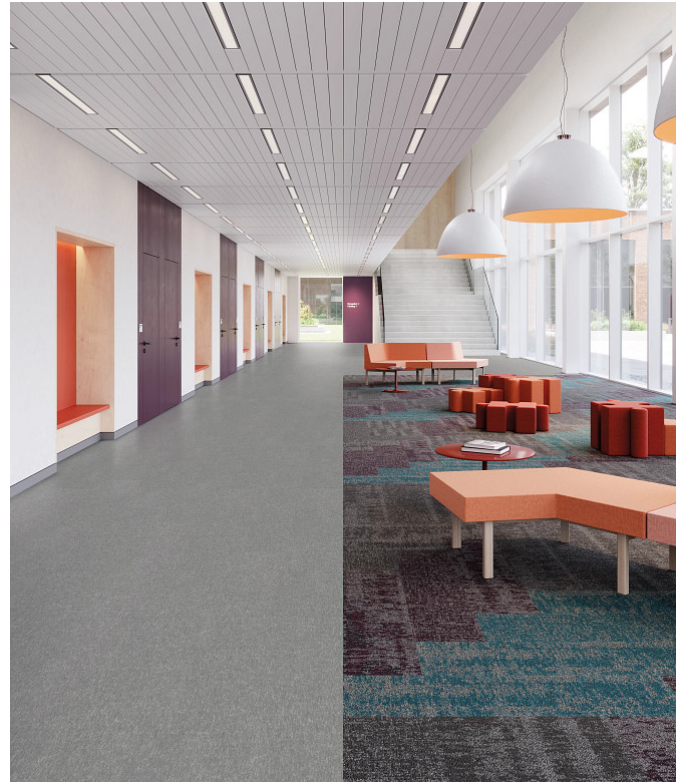

### Recommended Installation Method

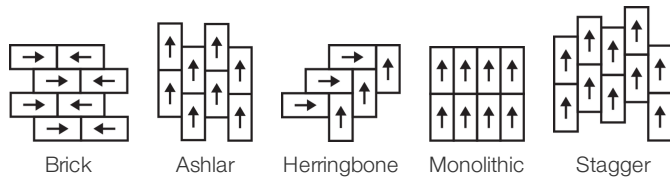

### Coordinating Products

Carpet Tile: Practice Tile, Discussion Tile, Curiosity Tile

### Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *2000 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	<b>Passes</b>	
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	30% (Pre-Consumer 30%   Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee*   Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
	CE Marking (EN 14041)   3rd Party Certified
	Country of Origin   United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>FloorScore Certificate</b>

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>FloorScore Certified</b>

Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](#) for more information.

Available Colorways

 Collaborate 24111 V1 - Uniform Appearance	 Participate 24114 V1 - Uniform Appearance	 Inquire 24326 V1 - Uniform Appearance	 Convey 24405 V2 - Slight Variation	 Connect 24410 V2 - Slight Variation	 Thought 24506 V1 - Uniform Appearance
 Converse 24518 V1 - Uniform Appearance	 Dynamic 24520 V1 - Uniform Appearance	 Retain 24535 V2 - Slight Variation	 Accomplish 24555 LRV 7.8   L* 33.65 V2 - Slight Variation	 Join 24761 V2 - Slight Variation	 Strategy 24855 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

