

Mindset Lvt


Collection	Set Up	
Numéro De Style	4124V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	12 in w x 24 in l	30 cm w x 61 cm l
Dimensions Réelles	12.00 in w x 24.00 in l	30.48 cm w x 60.96 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	18 pcs	
Surface Par Carton	36 sq ft	3.34 sq m
Poids Par Carton	32.4 lbs	14.7 kg

Méthodes d'Installation Conseillées

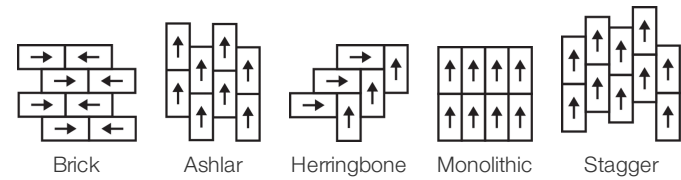

Coordination Des Produits

Carpet Tile: Practice Tile, Discussion Tile, Curiosity Tile

performance + Tests et essai

poinçonnement rémanent (ASTM F1914)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Commercial 15 Year Underbed Bond Warranty](#)

[Limitée Commerciale De 15 Ans](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

[FloorScore® | Agréé](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)

9.59 Kg CO₂/M²

30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

[Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost To The Customer.](#)

CE Marking (EN 14041) | [Certifié Par Un Tiers](#)

Country of Origin | United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certificate

Contribution Au Certificat Vert Leed

« Crédit MR : Divulcation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

 Collaborate 24111 V1 - Uniform Appearance	 Participate 24114 V1 - Uniform Appearance	 Inquire 24326 V1 - Uniform Appearance	 Convey 24405 V2 - Slight Variation	 Connect 24410 V2 - Slight Variation	 Thought 24506 V1 - Uniform Appearance
 Converse 24518 V1 - Uniform Appearance	 Dynamic 24520 V1 - Uniform Appearance	 Retain 24535 V2 - Slight Variation	 Accomplish 24555 LRV 7.8 L* 33.65 V2 - Slight Variation	 Join 24761 V2 - Slight Variation	 Strategy 24855 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

