


## Envelop


Collection	<b>Cover + Envelop</b>	
Style Number	<b>4141V</b>	
Class / ASTM F3261	<b>Class I, Type B</b>	
Finish	<b>ExoGuard+®</b>	
	U.s.	Metric
Nominal Dimensions	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Actual Dimensions	<b>7.00 in w x 48.00 in l</b>	<b>17.78 cm w x 121.92 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.157 in</b>	<b>4 mm</b>
Edge Profile	<b>Micro-Bevel</b>	
Installation Type	<b>InLine Level Edge</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>, 4200 Resilient Tile 4 Gallon, 4200 Resilient Sheet 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , or 4151 Multi-Use Premium 4 Gallon</b>	

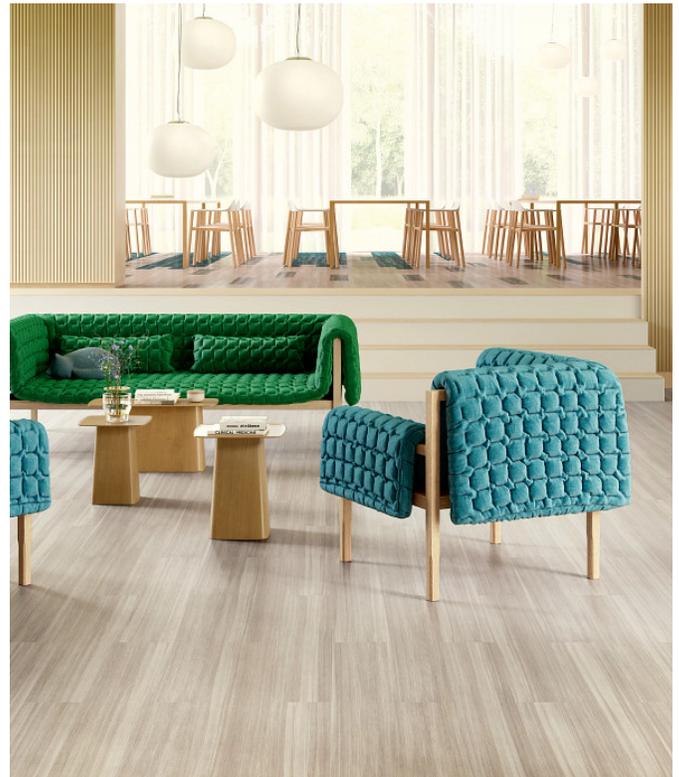

### Packaging

Area Per Carton	<b>27.96 sq ft</b>	<b>2.6 sq m</b>
Weight Per Carton	<b>42.24 lbs</b>	<b>19.16 kg</b>

### Recommended Installation Method

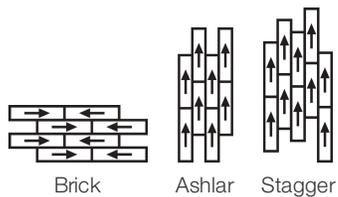

### Performance + Testing

Residual Indentation (Astm F1914)	<b>Passes</b>
Resistance To Heat (Astm F1514)	<b>Passes</b>
Resistance To Light (Astm F1515)	<b>Passes</b>
Resistance To Chemicals (Astm F925)	<b>Passes</b>
Radiant Panel (Astm E648)	<b>Passes, Class I</b>
Coefficient Of Friction (Astm D2407, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

---

[15 Year Commercial Limited](#)

[Commercial 15 Year Underbed Bond Warranty](#)

## Material Health & Environmental Certifications

---

### Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure

FloorScore® | Certified

### Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

20% (Pre-Consumer 20% | Post-Consumer 0%)

### Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

CE Marking (EN 14041) | 3rd Party Certified

Country of Origin | United States

## Green Leed Contribution Credit

---

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

## Additional Information

---

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. \*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

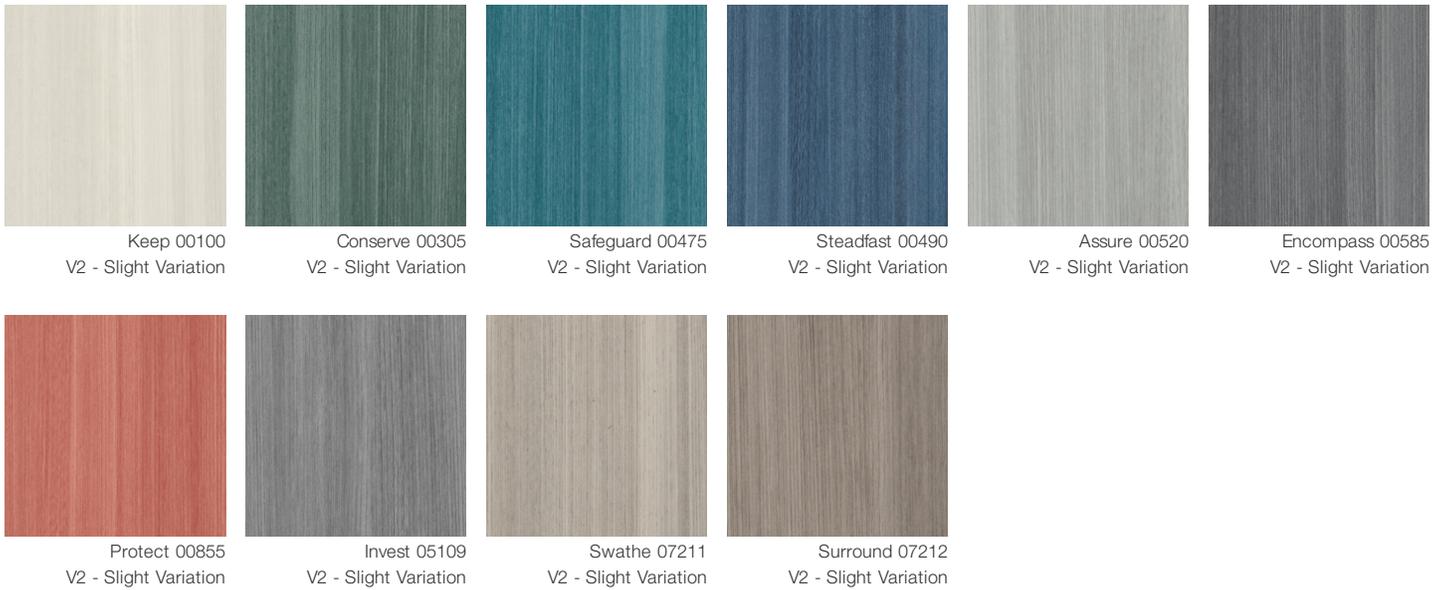

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

