


Coded

| | | |
|---------------------------|---|--------------------------|
| Collection | Dialogue | |
| Style Number | 4143V | |
| Construction | Heavy Commercial Luxury Vinyl Tile | |
| class | Class III, Type B | |
| Finish | ExoGuard+® | |
| | U.s. | Metric |
| Nominal Dimensions | 6 in w x 48 in l | 15 cm w x 122 cm l |
| Actual Dimensions | 6.00 in w x 48.00 in l | 15.24 cm w x 121.92 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Product Thickness | 0.197 in | 5 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|----------------|----------|-----------|
| Pieces Per Box | 10 pcs | |
| Area Per Box | 20 sq ft | 1.86 sq m |
| Weight Per Box | 35.1 lbs | 15.92 kg |

Recommended Installation Method

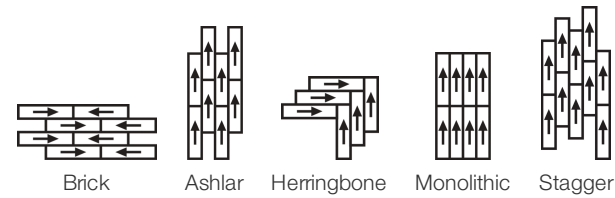

Coordinating Products

LVT: Type
Carpet Tile: Face To Face Tile, Spoken Tile, Written Tile, Translate Tile, Subtext Tile

Performance + Testing

| | |
|---|---|
| Residual Indentation (Astm F1914) | Passes |
| Resistance To Heat (Astm F1514) | Passes |
| Resistance To Light (Astm F1515) | Passes |
| Resistance To Chemicals (Astm F925) | Passes |
| Coefficient Of Friction (Astm D2407, Slip Resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content | 30% (Pre-Consumer 30% Post-Consumer 0%) |
| Global Product Assessment | Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer. FloorScore® Certified Country of Origin United States |


Green Leed Contribution Credit

| | |
|---|---|
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | FloorScore Certified |


Additional Information

| | |
|--|---|
| * To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability . Installation Guidelines Maintenance Guidelines | <p>Please visit www.shawcontract.com for the most current warranty information.</p> <p>Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.</p> <p>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.</p> <p>*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.</p> <p>Visit shawcontract.com/testing for more information.</p> |
|--|---|


Available Colorways




Converse 43100
V1 - Uniform Appearance




Relate 43210
V1 - Uniform Appearance




Connect 43375
V1 - Uniform Appearance




Inform 43429
V1 - Uniform Appearance




Declare 43504
V1 - Uniform Appearance




Convey 43515
V1 - Uniform Appearance




Imply 43518
V1 - Uniform Appearance




Describe 43530
V1 - Uniform Appearance




Share 43585
V1 - Uniform Appearance



Engage 43595
V1 - Uniform Appearance



Fluent 43715
V1 - Uniform Appearance



Interpret 43761
V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation