

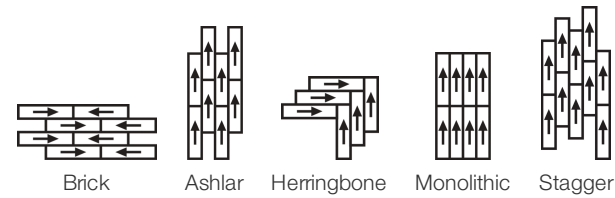
Coded

|                            |   |                          |
|----------------------------|---|--------------------------|
| Colección                  | Dialogue  |                          |
| Número De Estilo           | 4143V   |                          |
| Construcción               | Heavy Commercial Luxury Vinyl Tile  |                          |
| clase                      | Class III, Type B   |                          |
| Terminación                | ExoGuard+®  |                          |
|                            | U.s.  | Metric                   |
| Dimensiones Nominales      | 6 in w x 48 in l  | 15 cm w x 122 cm l       |
| Dimensiones Reales         | 6.00 in w x 48.00 in l  | 15.24 cm w x 121.92 cm l |
| Desgaste De La Capa De Uso | 20 mil (0.02 in)  | 0.51 mm                  |
| Espesor Total Del Producto | 0.197 in  | 5 mm                     |
| Perfil De Borde            | Borde Cuadrado  |                          |
| Installation Type          | Dry Back  |                          |
| Instalación                | Direct Glue   |                          |
| Adhesivo Recomendado       | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon |                          |

Embalaje

|                 |          |           |
|-----------------|----------|-----------|
| Piezas Por Caja | 10 pcs   |           |
| Área Por Caja   | 20 sq ft | 1.86 sq m |
| Peso Por Caja   | 35.1 lbs | 15.92 kg  |

Método De Instalación Recomendado



Productos Que Combinan

LVT: Type  
Carpet Tile: Face To Face Tile, Spoken Tile, Written Tile, Translate Tile, Subtext Tile

Desempeño + Pruebas

|   |   |
|---|---|
| Margen Adicional Residual (Astm F1914)                              | Passes  |
| Resistencia Al Calor (Astm F1514)                                   | Passes  |
| Resistencia A La Luz (Astm F1515)                                   | Passes  |
| Resistencia A Productos Químicos (Astm F925)                        | Passes  |
| Coefficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017

Total Recycled Content

30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

FloorScore® | Certificado

Country of Origin | United States

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción  
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión  
Opción 1: Cálculos de categoría de producto

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Información Adicional

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.













Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.





Visit [shawcontract.com/testing](#) for more information.

Available Colorways

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Converse 43100<br>V1 - Uniform Appearance  | Relate 43210<br>V1 - Uniform Appearance   | Connect 43375<br>V1 - Uniform Appearance  | Inform 43429<br>V1 - Uniform Appearance  | Declare 43504<br>V1 - Uniform Appearance  | Convey 43515<br>V1 - Uniform Appearance   |
|  |  |  |  |  |  |
| Imply 43518<br>V1 - Uniform Appearance   | Describe 43530<br>V1 - Uniform Appearance   | Share 43585<br>V1 - Uniform Appearance  | Engage 43595<br>V1 - Uniform Appearance  | Fluent 43715<br>V1 - Uniform Appearance   | Interpret 43761<br>V1 - Uniform Appearance  |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

|    |  |    |   |    |  |    |  |
|----|--|----|---|----|--|----|--|
| V1 |  | V2 |  | V3 |  | V4 |  |
|    | Uniform Appearance   |    | Slight Variation  |    | Moderate Variation   |    | Substantial Variation  |

