

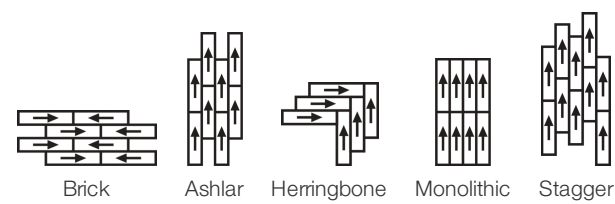
Coded

| | | |
|----------------------|---|--------------------------|
| Collection | Dialogue | |
| Numéro De Style | 4143V | |
| Construction | Carreau De Vinyle De Luxe Commercial Lourd | |
| classe | Class III, Type B | |
| Finition | ExoGuard+® | |
| Dimensions Nominales | Impérial | Métrique |
| | 6 in w x 48 in l | 15 cm w x 122 cm l |
| | 6.00 in w x 48.00 in l | 15.24 cm w x 121.92 cm l |
| | 20 mil (0.02 in) | 0.51 mm |
| | 0.197 in | 5 mm |
| | Bord Carré | |
| | Dry Back | |
| Installation Type | Direct Glue | |
| Installation | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon | |
| Adhésif Recommandé | | |

Emballage

| | | |
|--------------------|----------|-----------|
| Pièces Par Carton | 10 pcs | |
| Surface Par Carton | 20 sq ft | 1.86 sq m |
| Poids Par Carton | 35.1 lbs | 15.92 kg |

Méthodes d'Installation Conseillées



Coordination Des Produits

LVT: Type
Carpet Tile: Face To Face Tile, Spoken Tile, Written Tile, Translate Tile, Subtext Tile

Performance + Tests Et Essai

| | |
|--|---|
| Poinçonnement Rémanent (Astm F1914) | Passes |
| Résistance À La Chaleur (Astm F1514) | Passes |
| Résistance À La Lumière (Astm F1515) | Passes |
| Résistance Chimique (Astm F925) | Passes |
| Coefficient De Frottement (Astm D2407, Résistance Au Glissement) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Limitée Commerciale De 15 Ans](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017

Total Recycled Content

30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

FloorScore® | Agréé

Country of Origin | United States

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction
« Crédit MR : Divulgation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

Health Product Declaration (HPD) | 100 Ppm Disclosure
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.













Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.





Visit [shawcontract.com/testing](#) for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Converse 43100 V1 - Uniform Appearance | Relate 43210 V1 - Uniform Appearance | Connect 43375 V1 - Uniform Appearance | Inform 43429 V1 - Uniform Appearance | Declare 43504 V1 - Uniform Appearance | Convey 43515 V1 - Uniform Appearance |
|  |  |  |  |  |  |
| Imply 43518 V1 - Uniform Appearance | Describe 43530 V1 - Uniform Appearance | Share 43585 V1 - Uniform Appearance | Engage 43595 V1 - Uniform Appearance | Fluent 43715 V1 - Uniform Appearance | Interpret 43761 V1 - Uniform Appearance |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

| | | | | | | | |
|----|--|----|---|----|--|----|--|
| V1 |  | V2 |  | V3 |  | V4 |  |
| | Uniform Appearance | | Slight Variation | | Moderate Variation | | Substantial Variation |

