



Reframe

Style Number	4004V	
Product Type	Commercial Woven Luxury Vinyl Tile	
Collection	Reframe	
Construction	Standard	Data + Performance
Type of Floorcovering	EN 1307	textile vinyl tile without pile
Classification	ISO 10874	33 commercial heavy
Total Mass	EN ISO 23997	4.82 kg/m ²
Total Thickness	EN ISO 24346	3 mm
Finish		ExoGuard™ quartz enhanced urethane
Dimensions	EN 994	22.86 cm x 91.44 cm 16 tiles (3.34 sq m) per box
Weight per Box		17.2 kg




Performance


Flammability	EN 13501-1	Bfl-S1 (unadhered testing)
Thermal Resistance m ² K/W	ISO 8302	0.019 m ² K/W TOG 0.19
Electrostatic Propensity	EN 1815	≤ 2.0 kV (stroll test)
Slip Resistance	BS 7976-2	
	DIN 51130	R12 (shod ramp)
Dimensional Stability	EN ISO 23999	≤0.15%
Castor Chair	EN 425, ISO 4918	continuous use
Resistance to Damage at Cut Edges	EN 1814	passed
Residual Indentation	EN ISO 24343-1	0.13 mm
Stain and Chemical Resistance	EN ISO 26987	good resistance
Impact Sound Reduction	BS EN ISO 10140	ΔLw 6dB/17dB with 3mm underlay
Sound Absorption	ISO 354	Coffee/shoe polish
Colour Fastness to Light	BS EN ISO 105-BO2	5-6
Emissions	ISO 16000	TVOC < 1000 µg/m3 after 28 days

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.


Recommended Installation Method

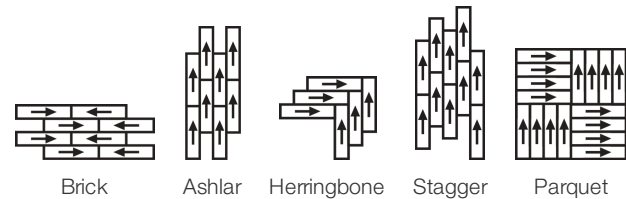

colour and visual variation index

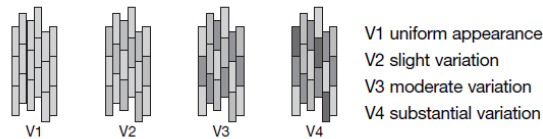

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

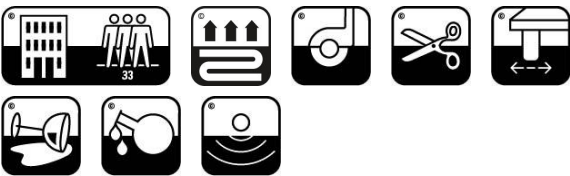

ΔLw 6dB/17dB with 3mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

Health Product Declaration (HPD)	1000 ppm Disclosure
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore®	Certified
CE Marking (EN 14041)	3rd Party Certified
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Country of Origin	South Korea

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified













[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Light Reflectance Value

					
Perception 04155 LRV 37.9 (range 32.5 - 44.2) V4 - Substantial Variation	Discovery 04201 LRV 43.0 (range 37.0 - 48.0) V4 - Substantial Variation	Exploration 04330 LRV 39.8 (range 34.4 - 44.6) V4 - Substantial Variation	Imagine 04340 LRV 25.3 (range 19.5-30.1) V4 - Substantial Variation	Stellar 04486 LRV 13.76 (range 9.1 - 18.0) V4 - Substantial Variation	Forge 04505 LRV 13.2 (range 8.7 - 17.8) V4 - Substantial Variation
					
Evolution 04515 LRV 35.6 (range 28.4 - 43.2) V4 - Substantial Variation	Introspect 04520 LRV 29.76 (range 21.3 - 39.3) V4 - Substantial Variation	Conversion 04530 LRV 21.5 (range 15.0 - 27.9) V4 - Substantial Variation	Progression 04751 LRV 23.4 (range 17.3 - 29.4) V4 - Substantial Variation	Construct 04761 LRV 25.4 (range 20.3 - 30.5) V4 - Substantial Variation	Evoke 04856 LRV 23.5 (range 18.4 - 28.4) V4 - Substantial Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

