

Reframe

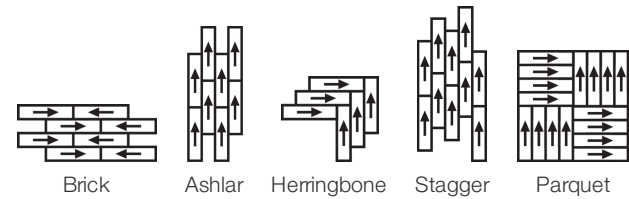
コレクション	Reframe	
スタイルナンバー	4004V	
建設	商業用の高級織ビニールタイル	
クラス	Class II, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	9 in w x 36 in l	23 cm w x 91 cm l
実際の寸法	9.00 in w x 36.00 in l	22.86 cm w x 91.44 cm l
製品全体の厚さ	0.118 in	3 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Dry Back	
インストール	Direct Glue	
推奨接着剤	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	16 pcs	
ボックスあたりの面積	36 sq ft	3.34 sq m
ボックスあたりの重量	37.92 lbs	17.2 kg



推奨インストール方法



パフォーマンス + テスト

残留圧痕 (astm F1914)	Passes
耐熱性 (astm F1514)	Passes
耐光性 (astm F1515)	Passes
耐薬品性 (astm F925)	Passes
摩擦係数(astm D2407、滑り抵抗)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[15年の商用限定保証](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.







属性+認定







Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	FloorScore® 認証取得
	CE Marking (EN 14041) 第三者認証取得
	Country of Origin Imported

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築 材料成分-オプション1：材料成分レポート	Health Product Declaration (HPD) 100 Ppm Disclosure
MRクレジット：製品の開示と最適化の構築 環境製品宣言-オプション1：環境製品宣言 (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQクレジット：低排出材料 オプション1：製品カテゴリの計算	FloorScore Certified
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit shawcontract.com/testing for more information.

Available Colorways

					
Perception 04155 LRV 37.9 (range 32.5 - 44.2) V4 - Substantial Variation	Discovery 04201 LRV 43.0 (range 37.0 - 48.0) V4 - Substantial Variation	Exploration 04330 LRV 39.8 (range 34.4 - 44.6) V4 - Substantial Variation	Imagine 04340 LRV 25.3 (range 19.5-30.1) V4 - Substantial Variation	Stellar 04486 LRV 13.76 (range 9.1 - 18.0) V4 - Substantial Variation	Forge 04505 LRV 13.2 (range 8.7 - 17.8) V4 - Substantial Variation

					
Evolution 04515	Introspect 04520	Conversion 04530	Progression 04751	Construct 04761	Evoke 04856
LRV 35.6 (range 28.4 - 43.2)	LRV 29.76 (range 21.3 - 39.3)	LRV 21.5 (range 15.0 - 27.9)	LRV 23.4 (range 17.3 - 29.4)	LRV 25.4 (range 20.3 - 30.5)	LRV 23.5 (range 18.4 - 28.4)
V4 - Substantial Variation	V4 - Substantial Variation	V4 - Substantial Variation	V4 - Substantial Variation	V4 - Substantial Variation	V4 - Substantial Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

