

Reframe


수집	Reframe	
스타일 번호	4004V	
구성	상용 우븐 고급 비닐타일	
수업	Class II, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	9 in w x 36 in l	23 cm w x 91 cm l
실제 치수	9.00 in w x 36.00 in l	22.86 cm w x 91.44 cm l
전체 제품 두께	0.118 in	3 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

포장

상자 당 조각	16 pcs	
상자 당 면적	36 sq ft	3.34 sq m
상자 당 무게	37.92 lbs	17.2 kg



권장 설치 방법

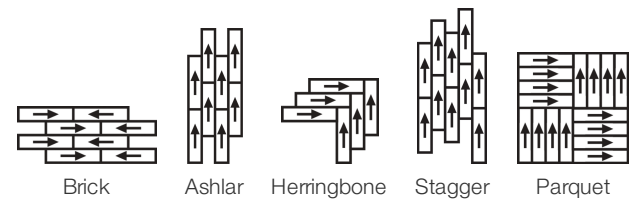

공연 + 테스트

잔차 들어 쓰기 (Astm F1914)	Passes
내열성 (Astm F1514)	Passes
내광성 (Astm F1515)	Passes
화학 물질에 대한 내성 (Astm F925)	Passes
마찰 계수(astm D2407, 미끄러짐 저항)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

15년 상용 제한

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.













속성 + 인증

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	FloorScore®   인증
	CE Marking (EN 14041)   타사 인증 획득
	Country of Origin   Imported

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축 재료 성분-옵션 1 : 재료 성분보고	Health Product Declaration (HPD)   100 Ppm Disclosure
MR 크레딧 : 제품 공개 및 최적화 구축 환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ 크레딧 : 저 발광 재료 옵션 1 : 제품 범주 계산	FloorScore Certified
Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

Available Colorways

 <p>Perception 04155 LRV 37.9 (range 32.5 - 44.2) V4 - Substantial Variation</p>	 <p>Discovery 04201 LRV 43.0 (range 37.0 - 48.0) V4 - Substantial Variation</p>	 <p>Exploration 04330 LRV 39.8 (range 34.4 - 44.6) V4 - Substantial Variation</p>	 <p>Imagine 04340 LRV 25.3 (range 19.5-30.1) V4 - Substantial Variation</p>	 <p>Stellar 04486 LRV 13.76 (range 9.1 - 18.0) V4 - Substantial Variation</p>	 <p>Forge 04505 LRV 13.2 (range 8.7 - 17.8) V4 - Substantial Variation</p>
 <p>Evolution 04515 LRV 35.6 (range 28.4 - 43.2) V4 - Substantial Variation</p>	 <p>Introspect 04520 LRV 29.76 (range 21.3 - 39.3) V4 - Substantial Variation</p>	 <p>Conversion 04530 LRV 21.5 (range 15.0 - 27.9) V4 - Substantial Variation</p>	 <p>Progression 04751 LRV 23.4 (range 17.3 - 29.4) V4 - Substantial Variation</p>	 <p>Construct 04761 LRV 25.4 (range 20.3 - 30.5) V4 - Substantial Variation</p>	 <p>Evoke 04856 LRV 23.5 (range 18.4 - 28.4) V4 - Substantial Variation</p>

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

