

## Compound 2.5 Mm


Coleção	<b>Compound + Cast</b>	
Número Do Produto	<b>4074V</b>	
Construção	<b>Heavy Commercial Luxury Vinyl Tile</b>	
classe	<b>Class III, Type B</b>	
Acabamento	<b>ExoGuard+®</b>	
	U.s.	Metric
Dimensões Nominais	<b>24 in w x 24 in l</b>	<b>61 cm w x 61 cm l</b>
Dimensões Reais	<b>24.00 in w x 24.00 in l</b>	<b>60.96 cm w x 60.96 cm l</b>
Espessura Da Camada De Uso	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Espessura Total Do Produto	<b>0.098 in</b>	<b>2.5 mm</b>
Perfil De Borda	<b>Borda Quadrada</b>	
Installation Type	<b>Dry Back</b>	
Instalação	<b>Direct Glue</b>	
Adesivo Recomendado	<b>S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon</b>	



### Empacotamento

Peças Por Caixa	<b>17 pcs</b>	
Área Por Caixa	<b>68 sq ft</b>	<b>6.32 sq m</b>
Peso Por Caixa	<b>54 lbs</b>	<b>24.49 kg</b>

### Método De Instalação Recomendado

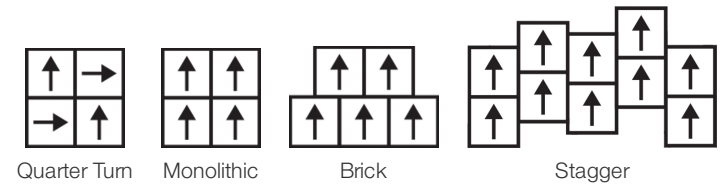

### Produtos Coordenados

LVT: Compound 5.0, Cast 2.5 Mm, Cast 5.0 Mm

### Desempenho + Teste

Recuo Residual (Astm F1914)	<b>Passes</b>
Resistência Ao Calor (Astm F1514)	<b>Passes</b>
Resistência À Luz (Astm F1515)	<b>Passes</b>
Resistência A Produtos Químicos (Astm F925)	<b>Passes</b>
Coefficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017

Total Recycled Content

30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

FloorScore® | Certificado

CE Marking (EN 14041) | Certificado 3rd Party

Country of Origin | United States

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Informação Adicional

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

Installation Guidelines

Maintenance Guidelines


Please visit [www.shawcontract.com](#) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](#) for more information.


Available Colorways




Relief 77111  
V2 - Slight Variation




Origin 77114  
V2 - Slight Variation




Patina 77405  
V2 - Slight Variation




Beryl 77429  
V2 - Slight Variation




Azure 77436  
V2 - Slight Variation




Base 77504  
V2 - Slight Variation




Threshold 77515  
V2 - Slight Variation




Elevate 77518  
V2 - Slight Variation




Chisel 77520  
V2 - Slight Variation




Onset 77525  
V2 - Slight Variation




Foundation 77530  
V2 - Slight Variation



Granite 77585  
V2 - Slight Variation



Bisque 77620  
V2 - Slight Variation



Terra Cotta 77715  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

