

Compound 5.0


Collection	Compound + Cast	
Style Number	4077V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+™	
	U.s.	Metric
Nominal Dimensions	24 in w x 24 in l	61 cm w x 61 cm l
Actual Dimensions	24.00 in w x 24.00 in l	60.96 cm w x 60.96 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation	Direct Glue	
Recommended Adhesive	LOKWORX+ RESILI, 4151, LG4100 4G, S150-95 or LOKWORX+ RESILI	

Packaging

Pieces Per Carton	8 pcs	
Area Per Carton	32 sq ft	2.97 sq m
Weight Per Carton	54.4 lbs	24.68 kg



Recommended Installation Method

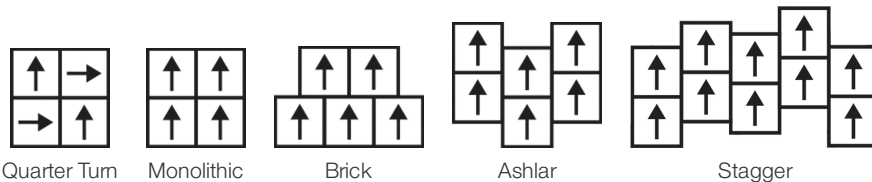

Coordinating Products

LVT: Compound 2.5 Mm, Cast 2.5 Mm, Cast 5.0 Mm

Performance + Testing

Residual Indentation (Astm F1914)	Passes
Resistance To Heat (Astm F1514)	Passes
Resistance To Light (Astm F1515)	Passes
Resistance To Chemicals (Astm F925)	Passes
Smoke Density (Astm E662, Flaming Mode)	Passes
Coefficient Of Friction (Astm D2407, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited](#)

[Commercial Limited Underbed Bond Shaw 4100, S150 Or Shaw 4151](#)

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributes + Certifications

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

FloorScore®

CE Marking (EN 14041)

Total Recycled Content

Country of Origin

[1000 ppm Disclosure](#)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

[Certified](#)

3rd Party Certified

30% (Pre-Consumer 30% | Post-Consumer 0%)

United States

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization

Environmental Product Declarations - Option 1: Environmental Product Declaration

EQ Credit: Low Emitting Materials

Option 1: Product Category Calculations

RFCi Industry Average EPD (50%)

FloorScore Certified

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2022 Shaw Industries Group, Inc., a Berkshire Hathaway Company
May 16, 2022

2 of 2