


Soundscape

Collection	Soundscape	
Style Number	4063V	
Construction	Unit / Guestroom Luxury Vinyl Tile With Acoustic Backing	
Attached Underlayment	Pad	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or Shaw 4151	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	20 sq ft	1.86 sq m
Weight per Carton	27.17 lbs	12.32 kg

Recommended Installation Method

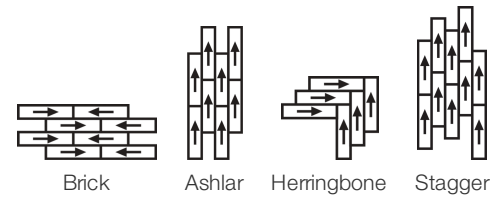

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

## Diversity &amp; Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health &amp; Environmental Certifications

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

## Climate Impact

Environmental Product Declaration (EPD)  
  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition  
  
X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
  
X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization  
  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates**

**FloorScore Certificate**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

## Installation Guidelines

## Maintenance Guidelines

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Honey 63103  
LRV 21.1 | L\* 53.02  
V2 - Slight Variation




Pebble 63111  
LRV 42.8 | L\* 71.42  
V2 - Slight Variation




Silk 63121  
LRV 42.4 | L\* 71.15  
V2 - Slight Variation




Rattan 63140  
LRV 36.3 | L\* 66.73  
V2 - Slight Variation




Feather 63155  
LRV 21 | L\* 52.97  
V2 - Slight Variation




Sand 63250  
LRV 32 | L\* 63.34  
V2 - Slight Variation



Ink 63549  
LRV 7.7 | L\* 33.33  
V2 - Slight Variation



Almond 63703  
LRV 13.3 | L\* 43.15  
V2 - Slight Variation



Latte 63720  
LRV 22.2 | L\* 54.28  
V2 - Slight Variation



Cinder 63760  
LRV 12.8 | L\* 42.47  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

