


Soundscape

Collection	Soundscape	
Numéro De Style	4063V	
Construction	Light Commercial Luxury Vinyl Tile With Acoustic Backing	
classe		
Endos Intégrée	Tampon	
Finition	ExoGuard®	
	Impérial	Métrique
Dimensions Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensions Réelles	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Approved Spaces	Units/Guestrooms Only	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or Shaw 4151	

Emballage

Pièces Par Carton	10 pcs	
Surface Par Carton	20 sq ft	1.86 sq m
Poids Par Carton	27.17 lbs	12.32 kg

Méthodes d'Installation Conseillées

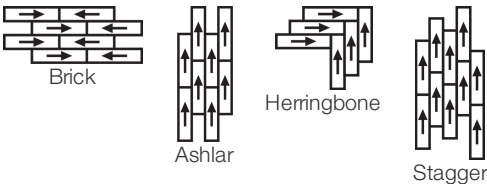

performance + Tests et essai

résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[15 Year Light Commercial Limited Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Agréé

## Climate Impact

Environmental Product Declaration (EPD)

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025,  
EN 15804 Et ISO 21930:2017

Embodied Carbon (Cradle to Gate)

11.59 Kg CO<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | Certifié Par Un Tiers  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

**Absence of Heavy Metals**

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

**Absence of Halogenated Flame Retardants**

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

**Ortho-Phthalates**

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

**FloorScore Certificate**

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulgarion et optimisation des produits de construction

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

« Crédit MR : Divulgarion et optimisation des produits de construction

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

Crédit EQ : matériaux faibles émissions

**FloorScore Certified**

[Installation Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Honey 63103 LRV 21.1   L* 53.02 V2 - Slight Variation	Pebble 63111 LRV 42.8   L* 71.42 V2 - Slight Variation	Silk 63121 LRV 42.4   L* 71.15 V2 - Slight Variation	Rattan 63140 LRV 36.3   L* 66.73 V2 - Slight Variation	Feather 63155 LRV 21   L* 52.97 V2 - Slight Variation	Sand 63250 LRV 32   L* 63.34 V2 - Slight Variation
					
Ink 63549 LRV 7.7   L* 33.33 V2 - Slight Variation	Almond 63703 LRV 13.3   L* 43.15 V2 - Slight Variation	Latte 63720 LRV 22.2   L* 54.28 V2 - Slight Variation	Cinder 63760 LRV 12.8   L* 42.47 V2 - Slight Variation		

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

