


Soundscape

|                   |  |                          |
|-------------------|--|--------------------------|
| コレクション            | Soundscape   |                          |
| スタイルナンバー          | 4063V  |                          |
| 建設                | Light Commercial Luxury Vinyl Tile With Acoustic Backing   |                          |
| クラス               |  |                          |
| 付属下敷              | パッド  |                          |
| 仕上げ               | ExoGuard®  |                          |
| 公称寸法              | 米国   | メートル法                    |
| 実際の寸法             | 6 in w x 48 in l   | 15 cm w x 122 cm l       |
| 摩耗層の厚さ            | 6.00 in w x 48.00 in l   | 15.24 cm w x 121.92 cm l |
| 製品全体の厚さ           | 20 mil (0.02 in)   | 0.51 mm                  |
| エッジプロファイル         | 0.197 in   | 5 mm                     |
| Installation Type | スクエア エッジ   |                          |
| インストール            | Dry Back   |                          |
| 推奨接着剤             | Direct Glue  |                          |
|                   | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or Shaw 4151 |                          |

包装

|            |           |           |
|------------|-----------|-----------|
| ボックスあたりの個数 | 10 pcs    |           |
| ボックスあたりの面積 | 20 sq ft  | 1.86 sq m |
| ボックスあたりの重量 | 27.17 lbs | 12.32 kg  |

推奨インストール方法

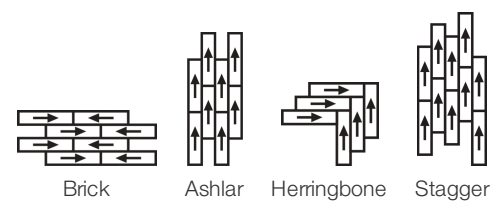

パフォーマンス + テスト

|                       |   |
|-----------------------|---|
| 耐熱性 (ASTM F1514)      | Passes  |
| 耐光性 (ASTM F1515)      | Passes  |
| 耐薬品性 (ASTM F925)      | Passes  |
| 放射パネル (ASTM E648)     | Passes, Class I   |
| 摩擦係数(ASTM D2407、滑り抵抗) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[15 Year Light Commercial Limited Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 属性+認定

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | 認証取得

## Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得  
11.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

CE Marking (EN 14041) | 第三者認証取得  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

## グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築  
材料成分-オプション1：材料成分レポート  
MRクレジット：製品の開示と最適化の構築  
環境製品宣言-オプション1：環境製品宣言 (EPD)  
EQクレジット：低排出材料  
オプション1：製品カテゴリの計算

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Honey 63103<br>LRV 21.1   L* 53.02<br>V2 - Slight Variation                      | Pebble 63111<br>LRV 42.8   L* 71.42<br>V2 - Slight Variation                      | Silk 63121<br>LRV 42.4   L* 71.15<br>V2 - Slight Variation                        | Rattan 63140<br>LRV 36.3   L* 66.73<br>V2 - Slight Variation                       | Feather 63155<br>LRV 21   L* 52.97<br>V2 - Slight Variation                         | Sand 63250<br>LRV 32   L* 63.34<br>V2 - Slight Variation                            |
|  |  |  |  |   |   |
| Ink 63549<br>LRV 7.7   L* 33.33<br>V2 - Slight Variation                         | Almond 63703<br>LRV 13.3   L* 43.15<br>V2 - Slight Variation                      | Latte 63720<br>LRV 22.2   L* 54.28<br>V2 - Slight Variation                       | Cinder 63760<br>LRV 12.8   L* 42.47<br>V2 - Slight Variation                       |   |   |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

