


Soundscape

수집	Soundscape	
스타일 번호	4063V	
구성	Light Commercial Luxury Vinyl Tile With Acoustic Backing	
수업		
첨부 된 밀 갈개	패드	
끝	ExoGuard®	
	미국	미터법
공칭 치수	6 in w x 48 in l	15 cm w x 122 cm l
실제 치수	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
마모 층 두께	20 mil (0.02 in)	0.51 mm
전체 제품 두께	0.197 in	5 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or Shaw 4151	

포장

상자 당 조각	10 pcs	
상자 당 면적	20 sq ft	1.86 sq m
상자 당 무게	27.17 lbs	12.32 kg

권장 설치 방법

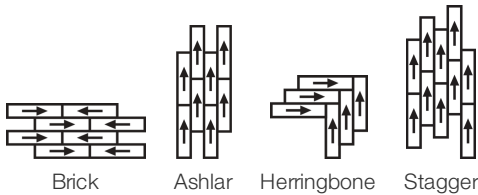

공연 + 테스트

내열성 (ASTM F1514)	Passes
내광성 (ASTM F1515)	Passes
화학 물질에 대한 내성 (ASTM F925)	Passes
복사 패널 (ASTM E648)	Passes, Class I
마찰 계수 (ASTM D2407, 미끄러짐 저항)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

[15년 상용 제한](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

속성 + 인증

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | 인증

Climate Impact

Environmental Product Declaration (EPD)
Embodied Carbon (Cradle to Gate)
Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득
11.59 Kg CO₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 타사 인증 획득
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축
재료 성분-옵션 1 : 재료 성분보고
MR 크레딧 : 제품 공개 및 최적화 구축
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)
EQ 크레딧 : 저 발광 재료
옵션 1 : 제품 범주 계산

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Honey 63103
LRV 21.1 | L* 53.02
V2 - Slight Variation




Pebble 63111
LRV 42.8 | L* 71.42
V2 - Slight Variation




Silk 63121
LRV 42.4 | L* 71.15
V2 - Slight Variation




Rattan 63140
LRV 36.3 | L* 66.73
V2 - Slight Variation




Feather 63155
LRV 21 | L* 52.97
V2 - Slight Variation




Sand 63250
LRV 32 | L* 63.34
V2 - Slight Variation




Ink 63549
LRV 7.7 | L* 33.33
V2 - Slight Variation



Almond 63703
LRV 13.3 | L* 43.15
V2 - Slight Variation



Latte 63720
LRV 22.2 | L* 54.28
V2 - Slight Variation



Cinder 63760
LRV 12.8 | L* 42.47
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

