

## Reside 12 Mil


Coleção	<b>Reside</b>	
Número Do Produto	<b>4094V</b>	
Construção	<b>Vinílico De Luxo Em Régua (Lvt) Com Fibra De Vidro</b>	
classe		
Acabamento	<b>ExoGuard®</b>	
	U.s.	Metric
Dimensões Nominais	<b>6 in w x 47 in l</b>	<b>15 cm w x 120 cm l</b>
Dimensões Reais	<b>5.91 in w x 47.24 in l</b>	<b>15.01 cm w x 119.99 cm l</b>
Espessura Da Camada De Uso	<b>12 mil (0.012 in)</b>	<b>0.3 mm</b>
Espessura Total Do Produto	<b>0.079 in</b>	<b>2 mm</b>
Perfil De Borda	<b>Borda Quadrada</b>	
Installation Type	<b>Dry Back</b>	
Instalação	<b>Direct Glue</b>	
Adesivo Recomendado	<b>S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon</b>	



## Empacotamento

Peças Por Caixa	<b>27 pcs</b>	
Área Por Caixa	<b>52.3 sq ft</b>	<b>4.86 sq m</b>
Peso Por Caixa	<b>40 lbs</b>	<b>18.14 kg</b>

## Método De Instalação Recomendado

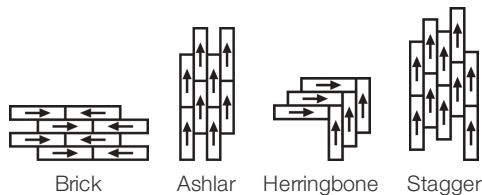

## Produtos Coordenados

LVT: Reside 8 Mil, Reside 6 Mil, Reside 20 Mil

## desempenho + teste

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	<b>Passes</b>	
resistência ao calor (ASTM F1514)	<b>Passes</b>	
resistência à luz (ASTM F1515)	<b>Passes</b>	
painel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[7 Year Light Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
Low Embodied Carbon  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos  
Absence of Heavy Metals  
Absence of Halogenated Flame Retardants  
  
Ortho-Phthalates  
FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais  
MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)  
Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore® Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

