


Branching Out Coretec 12 Mil

Colección	Branching Out	
Número De Estilo	4308V	
clase	Class III, Type B	
Manta Inferior Adicional	Almohadilla	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	7 in w x 48 in l	18 cm w x 122 cm l
Dimensiones Reales	6.92 in w x 48.03 in l	17.58 cm w x 122.00 cm l
Desgaste De La Capa De Uso	12 mil (0.012 in)	0.3 mm
Espesor Total Del Producto	0.173 in	4.4 mm
Perfil De Borde	Micro-Biselado	
Installation Type	Click	
Instalación	Floating Or Direct Glue	
Adhesivo Recomendado	, 4200 Resilient Tile 4 Gallon, 4200 Reslient Sheet 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	12 pcs	
Área Por Caja	27.73 sq ft	2.58 sq m
Peso Por Caja	41.32 lbs	18.74 kg

Método De Instalación Recomendado



Productos Que Combinan

COREtec: Branching Out Coretec 20 Mil  
LVT: Branching Out 5mm Acoustic, Branching Out 5.0 Mm

desempeño + pruebas

margen adicional residual (ASTM F1914)	Passes
resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
panel radiante (ASTM E648)	Passes, Class I

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[10 Year Light Commercial Limited Warranty](#)

Atributos + Certificaciones

Health & Wellbeing	
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	20.5 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

Contribución Para Créditos Leed


Crédito MR: Divulgación y optimización de productos de construcción Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de categoría de producto	<b>FloorScore® Certified</b>
<a href="#">Installation Guidelines</a>	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
<a href="#">Maintenance Guidelines</a>	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways

					
Alpine Oak 56100 V3 - Moderate Variation	Zion Oak 56103 V2 - Slight Variation	Rise Oak 56120 V3 - Moderate Variation	Riverside Oak 56140 V2 - Slight Variation	Prairie Oak 56240 V3 - Moderate Variation	Plains Oak 56250 V3 - Moderate Variation

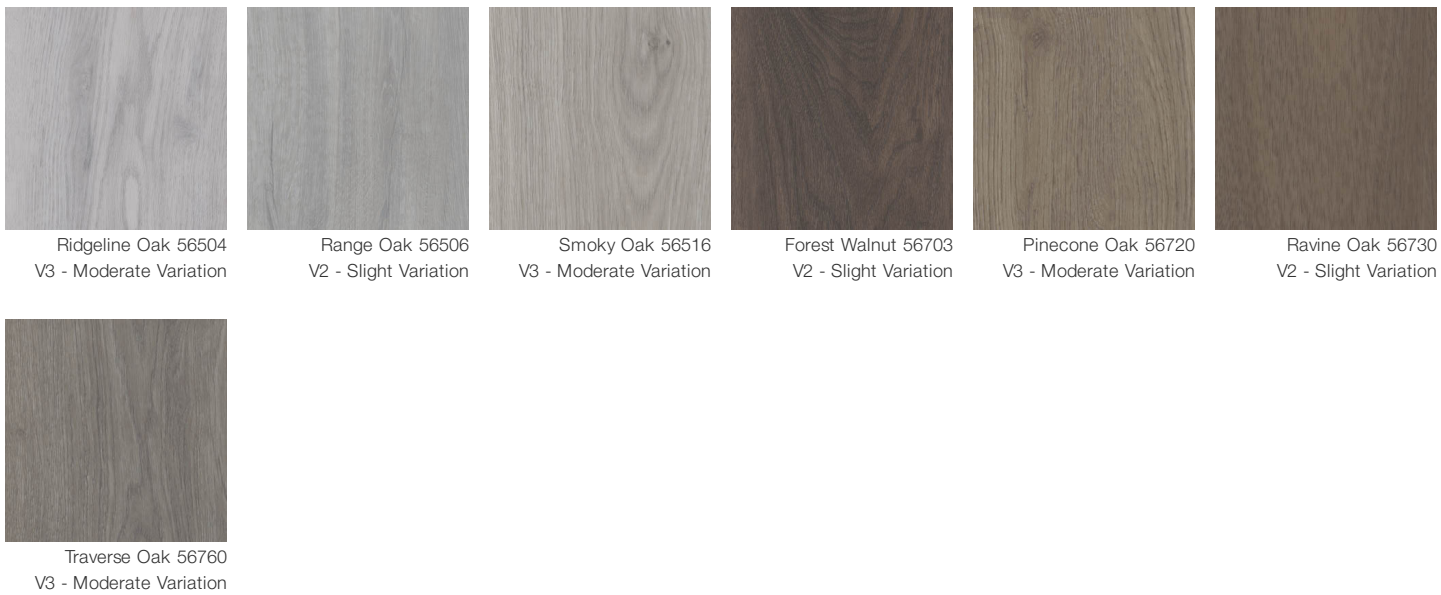


### Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1


Uniform Appearance

V2

Slight Variation

V3

Moderate Variation

V4

Substantial Variation