


## Origin


Collection	<b>Mineralfloor</b>	
Numéro De Style	<b>4338V</b>	
Construction	<b>Noyau Minéral Rigide Avec Profil Inline Level Edge</b>	
classe	<b>Class I, Type B</b>	
	Impérial	Métrique
Dimensions Nominales	<b>6 in w x 48 in l</b>	<b>14 cm w x 121 cm l</b>
Dimensions Réelles	<b>5.66 in w x 47.55 in l</b>	<b>14.38 cm w x 120.78 cm l</b>
Épaisseur Générale Du Produit	<b>0.236 in</b>	<b>6 mm</b>
Profil Du Bord	<b>Bevel</b>	
Installation Type	<b>InLine Level Edge</b>	
Installation	<b>Direct Glue</b>	
Adhésif Recommandé	<b>3 in 1 Ultra Rigid Mineral Core 4 Gallon</b>	

## Emballage

Pièces Par Carton	<b>12 pcs</b>	
Surface Par Carton	<b>22.46 sq ft</b>	<b>2.09 sq m</b>
Poids Par Carton	<b>39.91 lbs</b>	<b>18.1 kg</b>

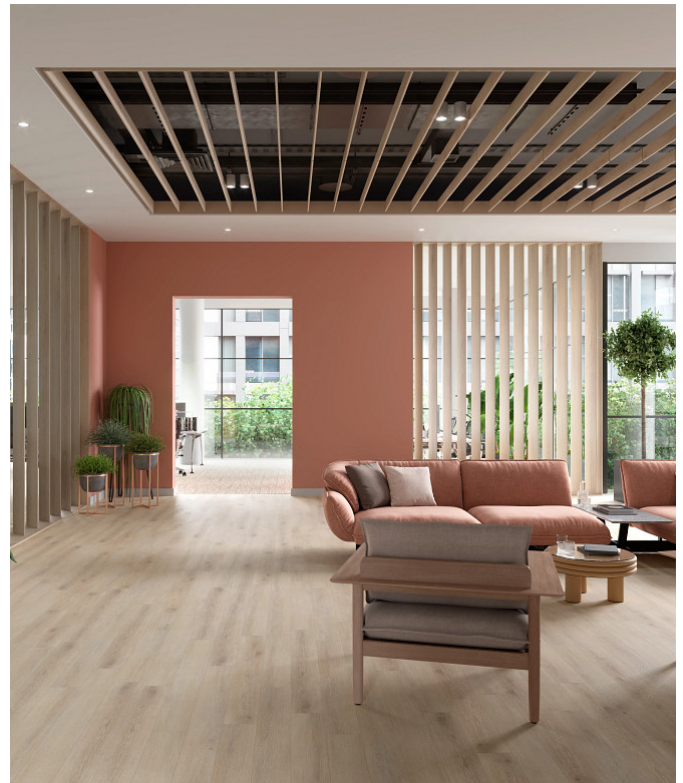

## Méthodes d'Installation Conseillées



## Coordination Des Produits

Rigid Core: Basis

performance + Tests et essai

poissonnement rémanent (ASTM F1914)	Passes
résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
densité de fumée (ASTM E662, mode flamme)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Garanties

Limitée Commerciale De 15 Ans

Attributs + Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Agréé
Climate Impact	
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt	Absence of Heavy Metals
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt	Absence of Halogenated Flame Retardants
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt	Ortho-Phthalates
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt	FloorScore Certificate

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgateion et optimisation des produits de construction	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Crédit EQ : matériaux faibles émissions	FloorScore Certified
Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

Available Colorways



Distinct 38115  
V3 - Moderate Variation



Initiate 38130  
V2 - Slight Variation



Theory 38140  
V2 - Slight Variation



Inherent 38700  
V3 - Moderate Variation



Prelude 38710  
V2 - Slight Variation



Composition 38720  
V2 - Slight Variation



Overture 38760  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

