


Origin


Coleção	Mineralfloor	
Número Do Produto	4338V	
Construção	Rigid Mineral Core With Inline Level Edge Profile	
classe	Class I, Type B	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	14 cm w x 121 cm l
Dimensões Reais	5.66 in w x 47.55 in l	14.38 cm w x 120.78 cm l
Espessura Total Do Produto	0.236 in	6 mm
Perfil De Borda	Chanfrado	
Installation Type	InLine Level Edge	
Instalação	Direct Glue	
Adesivo Recomendado	3 in 1 Ultra Rigid Mineral Core 4 Gallon	

Empacotamento

Peças Por Caixa	12 pcs	
Área Por Caixa	22.46 sq ft	2.09 sq m
Peso Por Caixa	39.91 lbs	18.1 kg

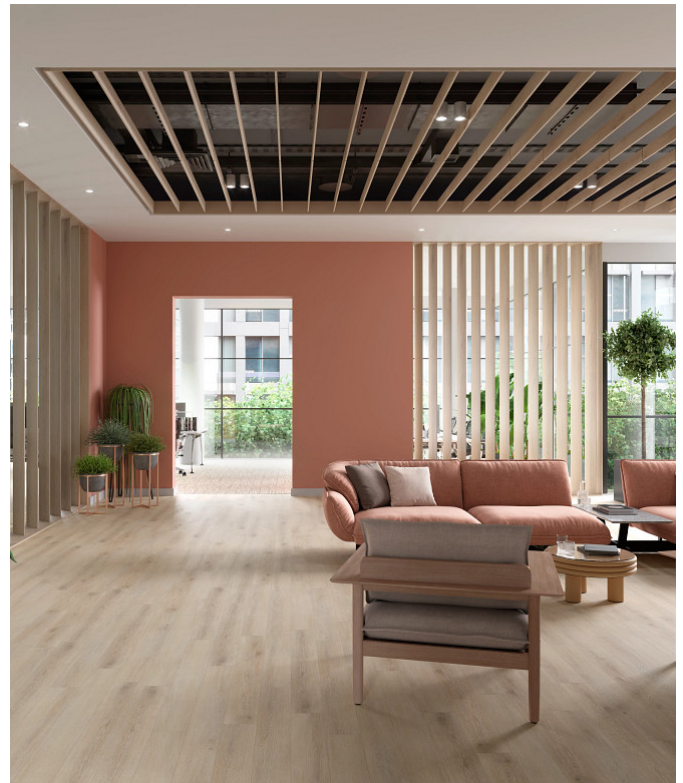

Método De Instalação Recomendado



Produtos Coordenados

Rigid Core: Basis

desempenho + teste

recuo residual (ASTM F1914)	Passes
resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
densidade de fumaça (ASTM E662, modo flamejante)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Garantias

15 Anos Comercial Limitada

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	FloorScore® Certified
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit shawcontract.com/testing for more information.

Available Colorways



Distinct 38115
V3 - Moderate Variation



Initiate 38130
V2 - Slight Variation



Theory 38140
V2 - Slight Variation



Inherent 38700
V3 - Moderate Variation



Prelude 38710
V2 - Slight Variation



Composition 38720
V2 - Slight Variation



Overture 38760
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

