


## Union

Coleção	<b>Unite II</b>	
Número Do Produto	<b>4349V</b>	
Construção	<b>Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro</b>	
classe	<b>Class III, Type B</b>	
Acabamento	<b>ExoGuard+®</b>	
	U.s.	Metric
Dimensões Nominais	<b>9 in w x 48 in l</b>	<b>23 cm w x 122 cm l</b>
Dimensões Reais	<b>9.00 in w x 48.00 in l</b>	<b>22.86 cm w x 121.92 cm l</b>
Espessura Da Camada De Uso	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Espessura Total Do Produto	<b>0.197 in</b>	<b>5 mm</b>
Perfil De Borda	<b>Borda Quadrada</b>	
Installation Type	<b>Loose Lay</b>	
Instalação	<b>Direct Glue Or Perimeter Glue</b>	
Adesivo Recomendado	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4252 Multi-Use (No heavy rolling or static loads) or 4151 Multi-Use Premium 4 Gallon</b>	

### Empacotamento

Peças Por Caixa	<b>8 pcs</b>	
Área Por Caixa	<b>24 sq ft</b>	<b>2.23 sq m</b>
Peso Por Caixa	<b>40.12 lbs</b>	<b>18.2 kg</b>

### Método De Instalação Recomendado

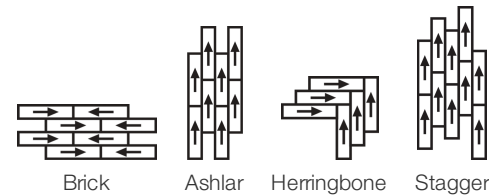

### Produtos Coordenados

LVT: Commingle, Inlet II, Solo 5.0



desempenho + teste

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
resistência ao calor (ASTM F1514)	<b>Passes</b>	
resistência à luz (ASTM F1515)	<b>Passes</b>	
resistência a produtos químicos (ASTM F925)	<b>Passes</b>	
painel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantias

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Anos Comercial Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.59 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore® Certified**


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


## Available Colorways



Concrete Valley 49103  
V3 - Moderate Variation




Slate Canyon 49114  
V3 - Moderate Variation




Concrete Path 49121  
V3 - Moderate Variation




Concrete Spindle 49140  
V3 - Moderate Variation




Concrete Refuge 49155  
V3 - Moderate Variation




Sandy Dune 49240  
V3 - Moderate Variation



Concrete Horizon 49515  
V3 - Moderate Variation



Iron Thatch 49720  
V3 - Moderate Variation



Iron Summit 49760  
V3 - Moderate Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

