


Inlet II

| | | |
|-----------------------------------|--|--------------------------|
| Collection | Unite II | |
| Style Number | 4372V | |
| Construction | Heavy Commercial Luxury Vinyl Tile With Fiberglass | |
| Class / ASTM Tested to ASTM F1700 | Class III, Type B | |
| Finish | ExoGuard+® | |
| | U.S. | Metric |
| Nominal Dimensions | 9 in w x 48 in l | 23 cm w x 122 cm l |
| Actual Dimensions | 9.00 in w x 48.00 in l | 22.86 cm w x 121.92 cm l |
| Wear Layer Thickness | 20 mil (0.02 in) | 0.51 mm |
| Overall Thickness | 0.197 in | 5 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Loose Lay | |
| Installation | Direct Glue Or Perimeter Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|-------------------|-----------|-----------|
| Pieces per Carton | 8 pcs | |
| Area per Carton | 24 sq ft | 2.23 sq m |
| Weight per Carton | 40.12 lbs | 18.2 kg |

Recommended Installation Method

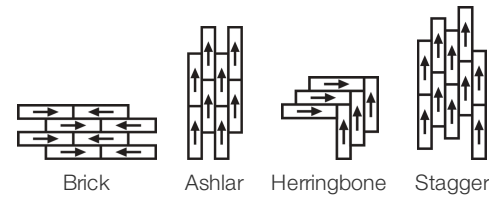

Coordinating Products

LVT: Union, Commingle, Solo 5.0

Performance + Testing

| | | |
|--|---|--|
| Static Load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | | |

Warranties

[15 Year Commercial Limited Warranty](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control
Part 2: Flooring Optimization

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of
this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse
suppliers from which to choose. Compared to non-allowable spend which includes
categories in which we do not have domestic, small or diverse suppliers available to
meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways



Valley 72103
V2 - Slight Variation



Canyon 72114
V2 - Slight Variation



Path 72121
LRV 48 | L* 74.83
V2 - Slight Variation



Spindle 72140
LRV 36.9 | L* 67.22
V2 - Slight Variation



Refuge 72155
LRV 55.56 | L* 23.5
V3 - Moderate Variation



Dune 72240
V2 - Slight Variation



Horizon 72515
V2 - Slight Variation



Thatch 72720
V3 - Moderate Variation



Summit 72760
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

