

Inlet II


Coleção	Unite II	
Número Do Produto	4372V	
Construção	Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	9 in w x 48 in l	23 cm w x 122 cm l
Dimensões Reais	9.00 in w x 48.00 in l	22.86 cm w x 121.92 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Loose Lay	
Instalação	Direct Glue Or Perimeter Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4252 Multi-Use 4 Gallon Adhesive or 4151 Multi-Use Premium 4 Gallon	



Empacotamento

Peças Por Caixa	8 pcs	
Área Por Caixa	24 sq ft	2.23 sq m
Peso Por Caixa	40.12 lbs	18.2 kg

Método De Instalação Recomendado

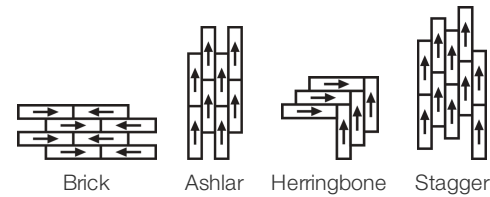

Produtos Coordenados

LVT: Union, Commingle, Solo 5.0

desempenho + teste

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
resistência ao calor (ASTM F1514)	<b>Passes</b>	
resistência à luz (ASTM F1515)	<b>Passes</b>	
resistência a produtos químicos (ASTM F925)	<b>Passes</b>	
painel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	7.31 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Low Embodied Carbon
Embodied Carbon (Cradle to Gate)	7.31 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

[Installation Guidelines](#)

[Maintenance Guidelines](#)

## Health Product Declaration (HPD) | 100 Ppm Disclosure

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore® Certified**


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


## Available Colorways




Valley 72103  
V2 - Slight Variation



Canyon 72114  
V2 - Slight Variation




Path 72121  
LRV 48 | L\* 74.83  
V2 - Slight Variation




Spindle 72140  
LRV 36.9 | L\* 67.22  
V2 - Slight Variation



Refuge 72155  
LRV 55.56 | L\* 23.5  
V3 - Moderate Variation




Dune 72240  
V2 - Slight Variation



Horizon 72515  
V2 - Slight Variation



Thatch 72720  
V3 - Moderate Variation



Summit 72760  
V2 - Slight Variation

## Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
April 18, 2025

3 of 3