


Vitality Tones


| | | |
|--------------------------|--|-------------|
| Collection | Vitality | |
| Style Number | 4375V | |
| Welding Rod Style Number | 184CA | |
| Construction | Commercial Homogeneous Sheet | |
| Finish | ExoGuard® | |
| | U.S. | Metric |
| Overall Thickness | 0.079 in | 2 mm |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, 4200 Resilient Sheet 1 Gallon, 4200 Resilient Sheet 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|------------------|-------------------------------|-----------------------------|
| Actual Roll Size | 6.56 ft w x 65.62 ft l | 2.00 m w x 20.00 m l |
| Area per Roll | 47.84 sy/roll | 40 sq m/roll |
| Weight per Roll | 286.6 lbs | 130 kg |

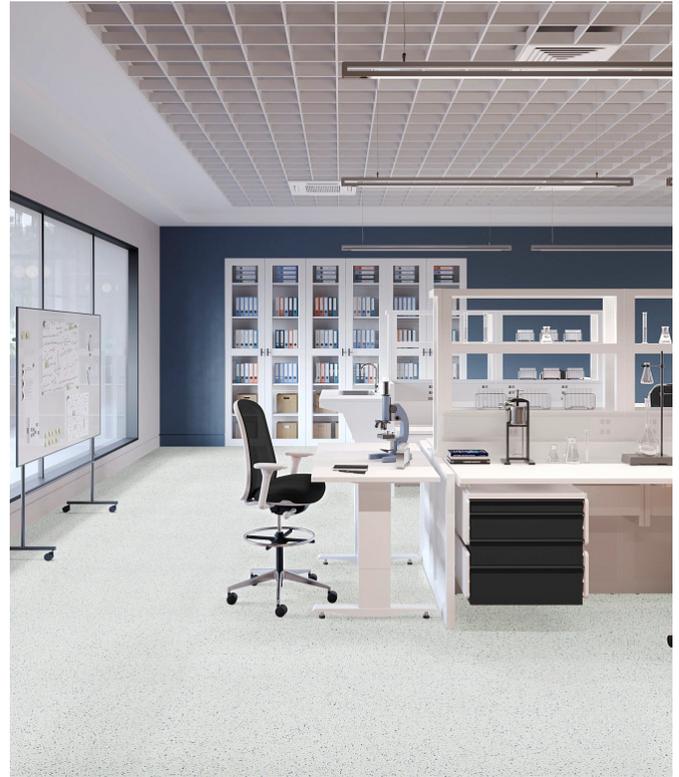

Recommended Installation Method



Reverse

Coordinating Products

Sheet: Vitality Sheet, Vitality Hues

Performance + Testing

| | | |
|---|--|--|
| Static Load (ASTM F970) | Passes (Modified), *2000 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914) | Passes | |
| Flexibility (ASTM F137) | Passes | |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

Climate Impact

Environmental Product Declaration (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

Embodied Carbon (Cradle to Gate)

7.04 Kg CO₂/M²

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | Certified

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

Absence of Heavy Metals

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

Absence of Halogenated Flame Retardants

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

Ortho-Phthalates

X11 Long Term Emissions Control
Part 2: Flooring Optimization

FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 100 Ppm Disclosure

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

FloorScore Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. *****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

