

Nordic 5.0

Style Number	4377V	
Product Type	Heavy Commercial Luxury Vinyl Tile With Fiberglass	
Collection	Nordic	
Construction	Standard	Data + Performance
Type of Floorcovering	EN 1307	Vinyl Tile
Classification	ISO 10874	33 commercial heavy
Total Mass	EN ISO 23997	9.17 kg/m ²
Total Thickness	EN ISO 24346	5 mm
Finish		ExoGuard+®
Dimensions	EN 994	18.42 cm x 121.92 cm 8 tiles (1.8 sq m) per box
Weight per Box		17.18 kg




Performance





Flammability	EN 13501-1	Bfl-S1 (unadhered testing)
Thermal Resistance m ² K/W	ISO 8302	0.018 m ² K/W
Electrostatic Propensity	EN 1815	≤ 2.0 kV (stroll test)
Slip Resistance	BS 7976-2	
	DIN 51130	R9 (shod ramp)
Dimensional Stability	EN ISO 23999	≤0.15%
Castor Chair	EN 425, ISO 4918	continuous use
Residual Indentation	EN ISO 24343-1	.08 mm
Impact Sound Reduction	BS EN ISO 10140	ΔLw 9dB/21dB with 2mm underlay
Sound Absorption	ISO 354	
Colour Fastness to Light	BS EN ISO 105-BO2	7-8

15 Year Commercial Limited Warranty, Commercial 15 Year Underbed Bond Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

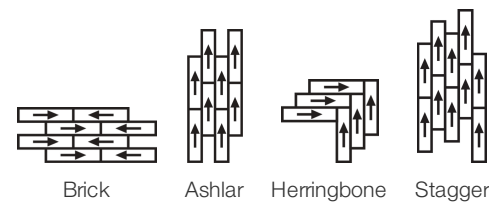Recommended Installation Method



colour and visual variation index




V1 uniform appearance
V2 slight variation
V3 moderate variation
V4 substantial variation

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.


Coordinating Products


LVT: Nordic 2.5

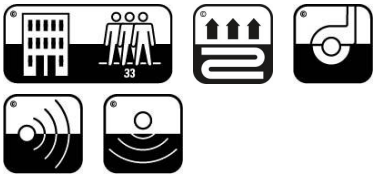




ΔLw 9dB/21dB with 2mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302


22
EU.DOP/1658/CPR/1222/1222/LVT
SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL
NETHERLANDS (NLD)
Notified Body 1658


22
UK.DOP/0321/CPR/1222/1222/LVT
SHAW EUROPE LIMITED BLACKADDIE RD,
SANQUHAR DG4 6DB, UNITED KINGDOM
Approved Body 1658



For use as an indoor floor covering as specified by the manufacturer

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

Health Product Declaration (HPD)	1000 ppm Disclosure
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore®	Certified
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Country of Origin	China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	Health Product Declaration (HPD) 1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.





Light Reflectance Value

					
<div><div></div><div>Honey 77103</div><div>LRV 26.8 L* 58.83</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Alder 77104</div><div>LRV 25.5 L* 57.57</div><div>V3 - Moderate Variation</div></div>	<div><div></div><div>Blonde 77112</div><div>LRV 37.6 L* 67.73</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Driftwood 77120</div><div>LRV 30.6 L* 62.16</div><div>V3 - Moderate Variation</div></div>	<div><div></div><div>Birch 77140</div><div>LRV 35.8 L* 66.35</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Fir 77155</div><div>LRV 42 L* 70.85</div><div>V2 - Slight Variation</div></div>
					
<div><div></div><div>Radiant 77710</div><div>LRV 21.1 L* 53.08</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Redwood 77720</div><div>LRV 22 L* 54.07</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Elm 77721</div><div>LRV 22.7 L* 54.81</div><div>V2 - Slight Variation</div></div>	<div><div></div><div>Golden 77756</div><div>LRV 15.2 L* 45.94</div><div>V3 - Moderate Variation</div></div>		

 **Quick Ship** In Stock - UK

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation