

Nordic 5.0


| | | |
|----------------------------|--|--------------------------|
| Colección | Nordic | |
| Número De Estilo | 4377V | |
| Construcción | Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio | |
| clase | Class III, Type B | |
| Terminación | ExoGuard+® | |
| | U.s. | Metric |
| Dimensiones Nominales | 7 in w x 48 in l | 18 cm w x 122 cm l |
| Dimensiones Reales | 7.25 in w x 48.00 in l | 18.42 cm w x 121.92 cm l |
| Desgaste De La Capa De Uso | 22 mil (0.022 in) | 0.56 mm |
| Espesor Total Del Producto | 0.197 in | 5 mm |
| Perfil De Borde | Micro-Biselado | |
| Installation Type | Loose Lay | |
| Instalación | Direct Glue Or Perimeter Glue | |
| Adhesivo Recomendado | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail or 4151 Multi-Use Premium 4 Gallon | |

Embalaje

| | | |
|-----------------|-------------|----------|
| Piezas Por Caja | 8 pcs | |
| Área Por Caja | 19.33 sq ft | 1.8 sq m |
| Peso Por Caja | 37.88 lbs | 17.18 kg |



Método De Instalación Recomendado

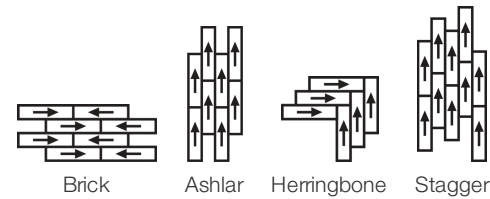

Productos Que Combinan

LVT: Nordic 2.5

Desempeño + Pruebas

| | | |
|---|---|--|
| Carga Estática (Astm F970) | Passes (Modified), *1500 lbs | Esta Prueba Tiene La Función De Comparar Propiedades Relativas De Diferentes Estilos Y Construcciones. Los Resultados Se Basan En Una Prueba De Laboratorio Y Se Utilizan Con Fines Comparativos: El Límite De Carga En La Vida Real Puede Variar. |
| Resistencia Al Calor (Astm F1514) | Passes | |
| Resistencia A La Luz (Astm F1515) | Passes | |
| Resistencia A Productos Químicos (Astm F925) | Passes | |
| Densidad De Humo (Astm E662, Modo Flameado) | Passes | |
| Panel Radiante (Astm E648) | Passes, Class I | Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. |
| Coefficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |

Garantías

[15 Años Limitado A Uso Comercial](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certificado |
| Climate Impact | |
| Environmental Product Declaration (EPD) | Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin China |

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Aspen 77100 LRV 54.5 L* 78.76 V2 - Slight Variation | Natural 77101 LRV 42.2 L* 71.03 V2 - Slight Variation | Honey 77103 LRV 26.8 L* 58.83 V2 - Slight Variation | Alder 77104 LRV 25.5 L* 57.57 V3 - Moderate Variation | Calm 77111 LRV 36.8 L* 67.16 V2 - Slight Variation | Blonde 77112 LRV 37.6 L* 67.73 V2 - Slight Variation |
|  |  |  |  |  |  |
| Driftwood 77120 LRV 30.6 L* 62.16 V3 - Moderate Variation | Birch 77140 LRV 35.8 L* 66.35 V2 - Slight Variation | Fir 77155 LRV 42 L* 70.85 V2 - Slight Variation | Radiant 77710 LRV 21.1 L* 53.08 V2 - Slight Variation | Redwood 77720 LRV 22 L* 54.07 V2 - Slight Variation | Elm 77721 LRV 22.7 L* 54.81 V2 - Slight Variation |
|  |  | | | | |
| Balance 77755 LRV 30.7 L* 62.29 V2 - Slight Variation | Golden 77756 LRV 15.2 L* 45.94 V3 - Moderate Variation | | | | |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

