


Nordic 5.0

Colección	Nordic	
Número De Estilo	4377V	
Construcción	Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	7 in w x 48 in l	18 cm w x 122 cm l
Dimensiones Reales	7.25 in w x 48.00 in l	18.42 cm w x 121.92 cm l
Desgaste De La Capa De Uso	22 mil (0.022 in)	0.56 mm
Espesor Total Del Producto	0.197 in	5 mm
Perfil De Borde	Micro-Biselado	
Installation Type	Loose Lay	
Instalación	Direct Glue Or Perimeter Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	8 pcs	
Área Por Caja	19.33 sq ft	1.8 sq m
Peso Por Caja	37.88 lbs	17.18 kg

Método De Instalación Recomendado

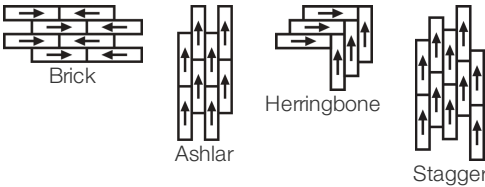

Productos Que Combinan

LVT: Nordic 2.5

desempeño + pruebas

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
resistencia al calor (ASTM F1514)	Passes	
resistencia a la luz (ASTM F1515)	Passes	
resistencia a productos químicos (ASTM F925)	Passes	
densidad de humo (ASTM E662, modo flameado)	Passes	
panel radiante (ASTM E648)	Passes, Class I	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Total Recycled Content

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
9.75 Kg CO₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate
Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore® Certified

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Aspen 77100 LRV 54.5 L* 78.76 V2 - Slight Variation	Natural 77101 LRV 42.2 L* 71.03 V2 - Slight Variation	Honey 77103 LRV 26.8 L* 58.83 V2 - Slight Variation	Alder 77104 LRV 25.5 L* 57.57 V3 - Moderate Variation	Calm 77111 LRV 36.8 L* 67.16 V2 - Slight Variation	Blonde 77112 LRV 37.6 L* 67.73 V2 - Slight Variation
					
Driftwood 77120 LRV 30.6 L* 62.16 V3 - Moderate Variation	Birch 77140 LRV 35.8 L* 66.35 V2 - Slight Variation	Fir 77155 LRV 42 L* 70.85 V2 - Slight Variation	Radiant 77710 LRV 21.1 L* 53.08 V2 - Slight Variation	Redwood 77720 LRV 22 L* 54.07 V2 - Slight Variation	Elm 77721 LRV 22.7 L* 54.81 V2 - Slight Variation
					
Balance 77755 LRV 30.7 L* 62.29 V2 - Slight Variation	Golden 77756 LRV 15.2 L* 45.94 V3 - Moderate Variation				

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

