


Innate Stria Tile

Collection	Innate + In Tandem	
Style Number	4367V	
Construction	Commercial Bio-Based Polyurethane Heterogeneous Tile	
Class / ASTM Tested to ASTM 1700	Tested To ASTM 1700	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	16 in w x 34 in l	40 cm w x 86 cm l
Actual Dimensions	15.83 in w x 33.94 in l	40.21 cm w x 86.21 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Tile 4 Gallon	
Packaging		
Pieces per Carton	12 pcs	
Area per Carton	44.75 sq ft	4.16 sq m
Weight per Carton	32.4 lbs	14.7 kg



Recommended Installation Method

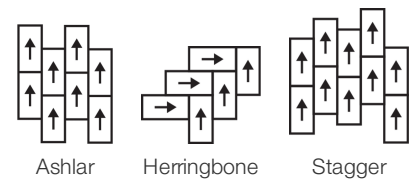

Coordinating Products

PVC-Free: Innate, In Tandem Sheet, In Tandem, Innate Sheet, Innate Linen Sheet

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

- 15 Year Commercial Limited Warranty
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency	Greenhealth Approved   Yes Cradle to Cradle Certified™   Silver Level (Version 3.1) Health Product Declaration (HPD)   1000 ppm Disclosure Declare   LBC Compliant
Indoor Air Quality	FloorScore®   Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

**C2C Silver Level (Version 3.1)**

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

**C2C Silver Level (Version 3.1)**

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

**C2C Silver Level (Version 3.1)**

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

**C2C Silver Level (Version 3.1)**

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**Floorscore**

X13 Enhanced Material Precaution  
Part 1: Select Optimized Materials Optimization

**C2C Silver Level (Version 3.1)**

X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**C2C Silver Level (Version 3.1)**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 2: Material Ingredient Optimization

**C2C Silver Level (Version 3.1)**

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with EN 15804, ISO 14025**

MR Credit: Building Product Disclosure and Optimization  
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

**Bio-Based Materials - Meets Astm D6866 And ISO 16620-2**

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**FloorScore Certified**

## Additional Information

**\*\*Meets or exceeds all local and national regulations in country of manufacture.**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

