

Innate Stria Tile


Colección	Innate + In Tandem	
Número De Estilo	4367V	
clase	Tested To ASTM 1700	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	16 in w x 34 in l	40 cm w x 86 cm l
Dimensiones Reales	15.83 in w x 33.94 in l	40.21 cm w x 86.21 cm l
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	4200 Resilient Tile 4 Gallon	

Embalaje

Piezas Por Caja	12 pcs	
Área Por Caja	44.75 sq ft	4.16 sq m
Peso Por Caja	32.4 lbs	14.7 kg



Método De Instalación Recomendado

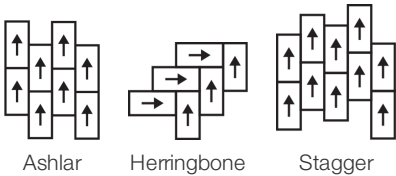

Productos Que Combinan

PVC-Free: Innate, In Tandem Sheet, In Tandem, Innate Sheet, Innate Linen Sheet

desempeño + pruebas

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	<b>Passes</b>	
resistencia al calor (ASTM F1514)	<b>Passes</b>	
resistencia a la luz (ASTM F1515)	<b>Passes</b>	
resistencia a productos químicos (ASTM F925)	<b>Passes</b>	
panel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved   Yes Cradle to Cradle Certified™   Nivel Plata (Versión 3.1) Health Product Declaration (HPD)   1000 ppm Disclosure Declare   Compatible LBC
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041)   Certificado Tercerizado Country of Origin   Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
 X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts  
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**C2C Nivel Plata (Versión 3.1)**  
**C2C Nivel Plata (Versión 3.1)**  
**C2C Nivel Plata (Versión 3.1)**  
**C2C Nivel Plata (Versión 3.1)**  
**Floorscore**  
**C2C Nivel Plata (Versión 3.1)**  
**C2C Nivel Plata (Versión 3.1)**

## Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
 Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales  
 Crédito MR: Divulgación y optimización de productos de construcción  
 Ingredientes de materiales - Opción 2: Optimización de ingredientes de los materiales  
 Crédito MR: Divulgación y optimización de productos de construcción  
 Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)  
 MR Credit: Building Product Disclosure and Optimization  
 Sourcing of Raw Materials - Option 2: Leadership Extraction Practices  
 Crédito EQ: Materiales de baja emisión  
 Opción 1: Cálculos de categoría de producto

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**C2C Nivel Plata (Versión 3.1)**  
**3rd Party Certified in Accordance with EN 15804, ISO 14025**  
**Bio-Based Materials - Meets Astm D6866 And ISO 16620-2**  
**FloorScore® Certified**

## Información Adicional

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
 Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways




Vapor 67104




Dune 67105




Pure 67111




Clay 67130




Coast 67405




Ocean 67416



Terra 67504



Haze 67515



Essential 67516



Season 67518

