


## Innate Stria Tile


Collection	<b>Innate + In Tandem</b>	
Numéro De Style	<b>4367V</b>	
Construction	<b>Carreaux De Tapis Hétérogène Commerciale EN Polyuréthane Biosourcé</b>	
classe	<b>Tested To ASTM 1700</b>	
Finition	<b>ExoGuard+®</b>	
	Impérial	Métrique
Dimensions Nominales	<b>16 in w x 34 in l</b>	<b>40 cm w x 86 cm l</b>
Dimensions Réelles	<b>15.83 in w x 33.94 in l</b>	<b>40.21 cm w x 86.21 cm l</b>
Épaisseur Générale Du Produit	<b>0.098 in</b>	<b>2.5 mm</b>
Profil Du Bord	<b>Bord Carré</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Adhésif Recommandé	<b>4200 Resilient Tile 4 Gallon</b>	

### Emballage

Pièces Par Carton	<b>12 pcs</b>	
Surface Par Carton	<b>44.75 sq ft</b>	<b>4.16 sq m</b>
Poids Par Carton	<b>32.4 lbs</b>	<b>14.7 kg</b>

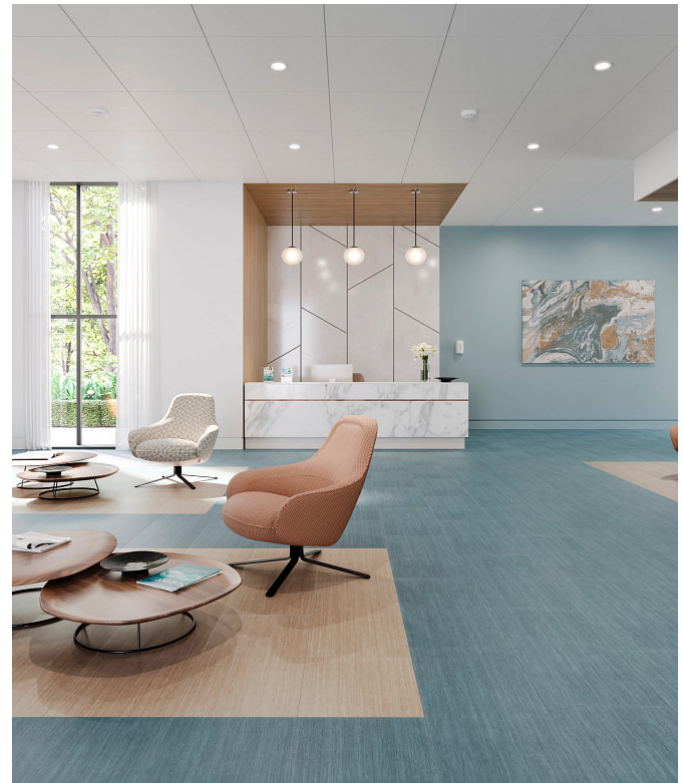

### Méthodes d'Installation Conseillées

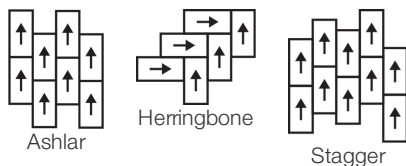

### Coordination Des Produits

PVC-Free: Innate, In Tandem Sheet, In Tandem, Innate Sheet, Innate Linen Sheet

### performance + Tests et essai

charge statique (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
poinçonnement rémanent (ASTM F1914)	<b>Passes</b>	
résistance à la chaleur (ASTM F1514)	<b>Passes</b>	
résistance à la lumière (ASTM F1515)	<b>Passes</b>	
résistance chimique (ASTM F925)	<b>Passes</b>	
Essai au panneau radiant (Astm E648)	<b>Passes, Class I</b>	
coefficient de frottement (ASTM D2407, résistance au glissement)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Limitée Commerciale De 15 Ans](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing	
Material Ingredient Transparency	<a href="#">Greenhealth Approved   Yes</a> <a href="#">Cradle to Cradle Certified™   Niveau Argent (Version 3.1)</a> <a href="#">Health Product Declaration (HPD)   1000 ppm Disclosure</a> <a href="#">Declare   Conforme LBC</a>
Indoor Air Quality	<a href="#">FloorScore®   Agréé</a> <a href="#">Greenguard Gold   Agréé</a>
Climate Impact	
Environmental Product Declaration (EPD)	<a href="#">Certifié Par Une Tierce Partie Conformément Aux Normes EN 15804, ISO 14025</a>
Embodied Carbon (Cradle to Gate)	2.76 Kg CO <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
<a href="#">CE Marking (EN 14041)   Certifié Par Un Tiers</a> <a href="#">Country of Origin   Imported</a>	

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>C2C Silver Level (Version 3.1)</b>
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt	<b>C2C Silver Level (Version 3.1)</b>
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt	<b>C2C Silver Level (Version 3.1)</b>
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt	<b>C2C Silver Level (Version 3.1)</b>
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt	<b>Floorscore</b>
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization - max 2 pts	<b>C2C Silver Level (Version 3.1)</b>
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts	<b>C2C Silver Level (Version 3.1)</b>

## Contribution Au Certificat Vert Leed

- « Crédit MR : Divulcation et optimisation des produits de construction
- « Crédit MR : Divulcation et optimisation des produits de construction
- « Crédit MR : Divulcation et optimisation des produits de construction

MR Credit: Building Product Disclosure and Optimization  
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

Crédit EQ : matériaux faibles émissions

## Informations Supplémentaires

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 100 Ppm Disclosure  
C2C Silver Level (Version 3.1)**

**3rd Party Certified in Accordance with EN 15804, ISO  
14025**

**Bio-Based Materials - Meets Astm D6866 And ISO  
16620-2**

**FloorScore & Greenguard Gold Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply  
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of  
this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



**Declare.**



**PVC-Free**



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 29, 2025

3 of 3