

Innate Stria Tile


Coleção	Innate + In Tandem	
Número Do Produto	4367V	
classe	Tested To ASTM 1700	
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	16 in w x 34 in l	40 cm w x 86 cm l
Dimensões Reais	15.83 in w x 33.94 in l	40.21 cm w x 86.21 cm l
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	4200 Resilient Tile 4 Gallon	

Empacotamento

Peças Por Caixa	12 pcs	
Área Por Caixa	44.75 sq ft	4.16 sq m
Peso Por Caixa	32.4 lbs	14.7 kg



Método De Instalação Recomendado

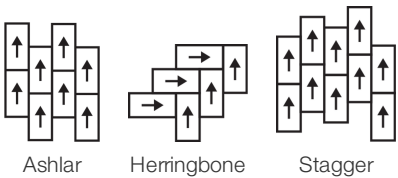

Produtos Coordenados

PVC-Free: Innate, In Tandem Sheet, In Tandem, Innate Sheet, Innate Linen Sheet

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.	
recuo residual (ASTM F1914)	Passes		
resistência ao calor (ASTM F1514)	Passes		
resistência à luz (ASTM F1515)	Passes		
resistência a produtos químicos (ASTM F925)	Passes		
painel radiante (ASTM E648)	Passes, Class I		
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.			

Garantias

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Anos Comercial Limitada](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved   Yes Cradle to Cradle Certified™   Nível Prata (Versão 3.1) Health Product Declaration (HPD)   1000 ppm Disclosure Declare   Compatível LBC
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
CE Marking (EN 14041)   Certificado 3rd Party Country of Origin   Imported	

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
 X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts  
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**C2C Nível Prata (Versão 3.1)****C2C Nível Prata (Versão 3.1)****C2C Nível Prata (Versão 3.1)****C2C Nível Prata (Versão 3.1)****Floorscore****C2C Nível Prata (Versão 3.1)****C2C Nível Prata (Versão 3.1)**

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
 Ingredientes materiais - Opção 1: Relatório de ingredientes materiais  
 MR Credit: Divulgação e otimização de produtos de construção  
 Ingredientes do material - Opção 2: Otimização do ingrediente do material  
 MR Credit: Divulgação e otimização de produtos de construção  
 Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)  
 MR Credit: Building Product Disclosure and Optimization  
 Sourcing of Raw Materials - Option 2: Leadership Extraction Practices  
 Crédito de EQ: Materiais de baixa emissão  
 Opção 1: cálculos de categoria de produto

**Health Product Declaration (HPD) | 100 Ppm Disclosure****C2C Nível Prata (Versão 3.1)****3rd Party Certified in Accordance with EN 15804, ISO 14025****Bio-Based Materials - Meets Astm D6866 And ISO 16620-2****FloorScore® Certified**

## Informação Adicional

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways




Vapor 67104




Dune 67105



Pure 67111




Clay 67130



Coast 67405




Ocean 67416



Terra 67504



Haze 67515



Essential 67516



Season 67518

