


## Crossing Paths 5.0


Collection	<b>Cultura</b>	
Style Number	<b>4392V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile With Fiberglass</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>18 in w x 18 in l</b>	<b>46 cm w x 46 cm l</b>
Actual Dimensions	<b>18.00 in w x 18.00 in l</b>	<b>45.72 cm w x 45.72 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.197 in</b>	<b>5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

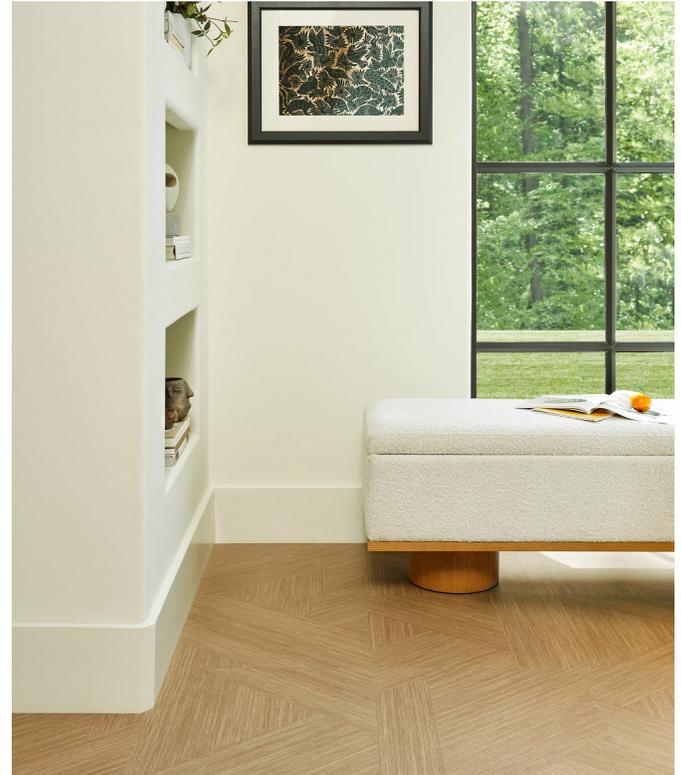

### Packaging

Pieces per Carton	<b>10 pcs</b>	
Area per Carton	<b>22.5 sq ft</b>	<b>2.09 sq m</b>
Weight per Carton	<b>39.18 lbs</b>	<b>17.77 kg</b>

### Recommended Installation Method

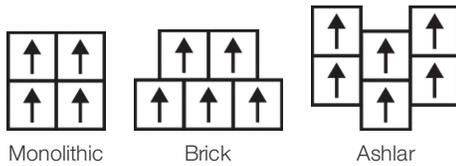

### Coordinating Products

LVT: In Unison 5.0, In Unison 2.5, Crossing Paths 2.5

Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile

Broadloom: Braided Broadloom, Valle Broadloom

## Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *750 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

- [Commercial 15 Year Underbed Bond Warranty](#)
- [15 Year Commercial Limited Warranty](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency [Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

### Climate Impact

Environmental Product Declaration (EPD) [3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

Embodied Carbon (Cradle to Gate) [11.59 Kg CO<sub>2</sub>/M<sup>2</sup>](#)

Total Recycled Content [20% \(Pre-Consumer 20% | Post-Consumer 0%\)](#)

### Global Product Assessment

[Country of Origin | Imported](#)

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>FloorScore Certificate</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Eggshell 91111  
V3 - Moderate Variation



Spindle 91140  
V3 - Moderate Variation



Sandy Dune 91240  
V3 - Moderate Variation



Smoky Oak 91516  
V3 - Moderate Variation



Caster 91518  
V3 - Moderate Variation



Gesso 91520  
V3 - Moderate Variation



Thatch 91720  
V3 - Moderate Variation



Grove 91737  
V3 - Moderate Variation



Summit 91760  
V3 - Moderate Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

