


Crossing Paths 5.0

| | | |
|----------------------------|---|--------------------------------|
| Coleção | Cultura | |
| Número Do Produto | 4392V | |
| Construção | Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibras De Vidro | |
| classe | Class III, Type B | |
| Acabamento | ExoGuard+® | |
| | U.s. | Metric |
| Dimensões Nominais | 18 in w x 18 in l | 46 cm w x 46 cm l |
| Dimensões Reais | 18.00 in w x 18.00 in l | 45.72 cm w x 45.72 cm l |
| Espessura Da Camada De Uso | 20 mil (0.02 in) | 0.51 mm |
| Espessura Total Do Produto | 0.197 in | 5 mm |
| Perfil De Borda | Borda Quadrada | |
| Installation Type | Dry Back | |
| Instalação | Direct Glue | |
| Adesivo Recomendado | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Empacotamento

| | | |
|-----------------|-------------------|------------------|
| Peças Por Caixa | 10 pcs | |
| Área Por Caixa | 22.5 sq ft | 2.09 sq m |
| Peso Por Caixa | 39.18 lbs | 17.77 kg |

Método De Instalação Recomendado

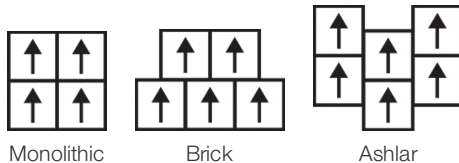

Produtos Coordenados

LVT: In Unison 5.0, In Unison 2.5, Crossing Paths 2.5

Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile

Broadloom: Braided Broadloom, Valle Broadloom



desempenho + teste

| | |
|--|---|
| resistência ao calor (ASTM F1514) | Passes |
| resistência à luz (ASTM F1515) | Passes |
| resistência a produtos químicos (ASTM F925) | Passes |
| painel radiante (ASTM E648) | Passes, Class I |
| coeficiente de atrito (ASTM D2407, resistência ao deslizamento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garantias

[15 Anos Comercial Limitada](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content | 20% (Pre-Consumer 20% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin Imported |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | FloorScore Certificate |
| X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts | Health Product Declaration (HPD) 1000 Ppm Disclosure |

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017


Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways



Eggshell 91111
V3 - Moderate Variation




Spindle 91140
V3 - Moderate Variation




Sandy Dune 91240
V3 - Moderate Variation




Smoky Oak 91516
V3 - Moderate Variation




Caster 91518
V3 - Moderate Variation




Gesso 91520
V3 - Moderate Variation



Thatch 91720
V3 - Moderate Variation



Grove 91737
V3 - Moderate Variation



Summit 91760
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

