


Crossing Paths 5.0

|                            |   |                         |
|----------------------------|---|-------------------------|
| Coleção                    | Cultura   |                         |
| Número Do Produto          | 4392V   |                         |
| Construção                 | Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro   |                         |
| classe                     | Class III, Type B   |                         |
| Acabamento                 | ExoGuard+®  |                         |
|                            | U.s.  | Metric                  |
| Dimensões Nominais         | 18 in w x 18 in l   | 46 cm w x 46 cm l       |
| Dimensões Reais            | 18.00 in w x 18.00 in l   | 45.72 cm w x 45.72 cm l |
| Espessura Da Camada De Uso | 20 mil (0.02 in)  | 0.51 mm                 |
| Espessura Total Do Produto | 0.197 in  | 5 mm                    |
| Perfil De Borda            | Borda Quadrada  |                         |
| Installation Type          | Dry Back  |                         |
| Instalação                 | Direct Glue   |                         |
| Adesivo Recomendado        | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon |                         |

Empacotamento

|                 |            |           |
|-----------------|------------|-----------|
| Peças Por Caixa | 10 pcs     |           |
| Área Por Caixa  | 22.5 sq ft | 2.09 sq m |
| Peso Por Caixa  | 39.18 lbs  | 17.77 kg  |

Método De Instalação Recomendado

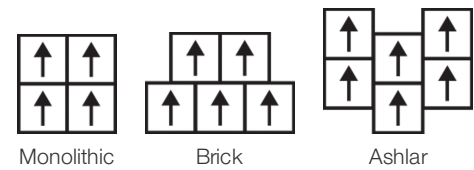

Produtos Coordenados

LVT: In Unison 5.0, In Unison 2.5, Crossing Paths 2.5  
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile  
Broadloom: Braided Broadloom, Valle Broadloom

Desempenho + Teste

|   |   |
|---|---|
| Resistência Ao Calor (Astm F1514)                               | Passes  |
| Resistência À Luz (Astm F1515)                                  | Passes  |
| Resistência A Produtos Químicos (Astm F925)                     | Passes  |
| Coeficiente De Atrito (Astm D2407, Resistência Ao Deslizamento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificações

Climate Impact

Environmental Product Declaration (EPD)

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)

Total Recycled Content

20% (Pre-Consumer 20% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

[Installation Guidelines](#)

Maintenance Guidelines

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Eggshell 91111  
V3 - Moderate Variation



Spindle 91140  
V3 - Moderate Variation



Sandy Dune 91240  
V3 - Moderate Variation



Smoky Oak 91516  
V3 - Moderate Variation



Caster 91518  
V3 - Moderate Variation



Gesso 91520  
V3 - Moderate Variation



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

