

In Unison 5.0


|                            |  |                         |
|----------------------------|--|-------------------------|
| Colección                  | Cultura  |                         |
| Número De Estilo           | 4391V  |                         |
| Construcción               | Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio  |                         |
| clase                      | Class III, Type B  |                         |
| Terminación                | ExoGuard+®   |                         |
|                            | U.s.   | Metric                  |
| Dimensiones Nominales      | 9 in w x 36 in l   | 23 cm w x 91 cm l       |
| Dimensiones Reales         | 9.00 in w x 36.00 in l   | 22.86 cm w x 91.44 cm l |
| Desgaste De La Capa De Uso | 20 mil (0.02 in)   | 0.51 mm                 |
| Espesor Total Del Producto | 0.197 in   | 5 mm                    |
| Perfil De Borde            | Borde Cuadrado   |                         |
| Installation Type          | Dry Back   |                         |
| Instalación                | Direct Glue  |                         |
| Adhesivo Recomendado       | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon |                         |

Embalaje

|                 |            |           |
|-----------------|------------|-----------|
| Piezas Por Caja | 10 pcs     |           |
| Área Por Caja   | 22.5 sq ft | 2.09 sq m |
| Peso Por Caja   | 39.18 lbs  | 17.77 kg  |



Método De Instalación Recomendado

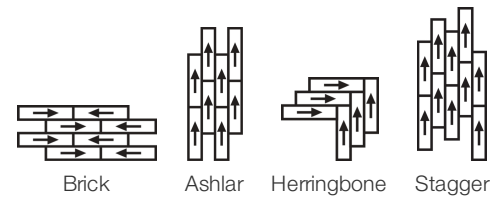

Productos Que Combinan

LVT: Crossing Paths 5.0, In Unison 2.5, Crossing Paths 2.5  
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile  
Broadloom: Braided Broadloom, Valle Broadloom

desempeño + pruebas

|  |   |
|--|---|
| resistencia al calor (ASTM F1514)  | Passes  |
| resistencia a la luz (ASTM F1515)  | Passes  |
| resistencia a productos químicos (ASTM F925)   | Passes  |
| panel radiante (ASTM E648)   | Passes, Class I   |
| coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)   | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. |   |

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

|   |   |
|---|---|
| Health & Wellbeing                      |   |
| Material Ingredient Transparency        | Health Product Declaration (HPD)   1000 ppm Disclosure                                |
| Indoor Air Quality                      | FloorScore®   Certificado   |
| Climate Impact                          |   |
| Environmental Product Declaration (EPD) | Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content                  | 20% (Pre-Consumer 20%   Post-Consumer 0%)   |
| Global Product Assessment               | Country of Origin   Imported  |

WELL V2 Contribution Credit

|  |   |
|--|---|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition                         | Absence of Asbestos                     |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt                   | Absence of Heavy Metals                 |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt                               | Ortho-Phthalates                        |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt                                     | FloorScore Certificate                  |

Contribución Para Créditos Leed

|  |  |
|--|--|
| Crédito MR: Divulgación y optimización de productos de construcción<br>Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Crédito EQ: Materiales de baja emisión<br>Opción 1: Cálculos de categoría de producto  | FloorScore® Certified  |

|   |  |
|---|--|
| <a href="#">Installation Guidelines</a><br><a href="#">Maintenance Guidelines</a> | Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.<br>Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.<br>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.<br>Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information. |
|---|--|

## Available Colorways



### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

