


In Unison 5.0

| | | |
|----------------------------|--|-------------------------|
| Colección | Cultura | |
| Número De Estilo | 4391V | |
| Construcción | Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio | |
| clase | Class III, Type B | |
| Terminación | ExoGuard+® | |
| | U.s. | Metric |
| Dimensiones Nominales | 9 in w x 36 in l | 23 cm w x 91 cm l |
| Dimensiones Reales | 9.00 in w x 36.00 in l | 22.86 cm w x 91.44 cm l |
| Desgaste De La Capa De Uso | 20 mil (0.02 in) | 0.51 mm |
| Espesor Total Del Producto | 0.197 in | 5 mm |
| Perfil De Borde | Borde Cuadrado | |
| Installation Type | Dry Back | |
| Instalación | Direct Glue | |
| Adhesivo Recomendado | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Embalaje

| | | |
|-----------------|------------|-----------|
| Piezas Por Caja | 10 pcs | |
| Área Por Caja | 22.5 sq ft | 2.09 sq m |
| Peso Por Caja | 39.18 lbs | 17.77 kg |

Método De Instalación Recomendado

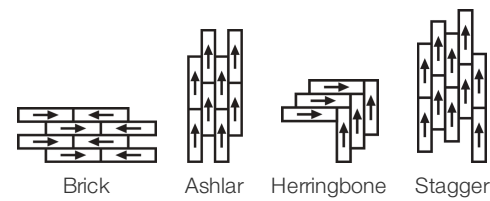

Productos Que Combinan

LVT: Crossing Paths 5.0, In Unison 2.5, Crossing Paths 2.5
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile
Broadloom: Braided Broadloom, Valle Broadloom



Desempeño + Pruebas

| | |
|--|---|
| Resistencia Al Calor (Astm F1514) | Passes |
| Resistencia A La Luz (Astm F1515) | Passes |
| Resistencia A Productos Químicos (Astm F925) | Passes |
| Panel Radiante (Astm E648) | Passes, Class I |
| Coefficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garantías

15 Años Limitado A Uso Comercial
Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend**** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

| | |
|---|---|
| Health & Wellbeing | |
| Indoor Air Quality | FloorScore® Certificado |
| Climate Impact | |
| Environmental Product Declaration (EPD) | Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content | 20% (Pre-Consumer 20% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin Imported |

Contribución Para Créditos Leed

| | |
|--|---|
| Crédito MR: Divulgación y optimización de productos de construcción Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de categoría de producto | FloorScore Certified |
| Installation Guidelines | Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. |
| Maintenance Guidelines | |

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways



Eggshell 91111
V2 - Slight Variation



Spindle 91140
V2 - Slight Variation



Sandy Dune 91240
V2 - Slight Variation



Link 91375
V2 - Slight Variation



Unify 91450
V2 - Slight Variation



Together 91475
V2 - Slight Variation



Smoky Oak 91516
V2 - Slight Variation



Caster 91518
V2 - Slight Variation



Gesso 91520
V2 - Slight Variation



Include 91680
V2 - Slight Variation



Merge 91700
V2 - Slight Variation



Thatch 91720
V2 - Slight Variation



Grove 91737
V2 - Slight Variation



Summit 91760
V2 - Slight Variation



Join 91895
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

