

In Unison 5.0


| | | |
|----------------------------|--|-------------------------|
| Colección | Cultura | |
| Número De Estilo | 4391V | |
| Construcción | Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio | |
| clase | Class III, Type B | |
| Terminación | ExoGuard+® | |
| | U.s. | Metric |
| Dimensiones Nominales | 9 in w x 36 in l | 23 cm w x 91 cm l |
| Dimensiones Reales | 9.00 in w x 36.00 in l | 22.86 cm w x 91.44 cm l |
| Desgaste De La Capa De Uso | 20 mil (0.02 in) | 0.51 mm |
| Espesor Total Del Producto | 0.197 in | 5 mm |
| Perfil De Borde | Borde Cuadrado | |
| Installation Type | Dry Back | |
| Instalación | Direct Glue | |
| Adhesivo Recomendado | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Embalaje

| | | |
|-----------------|------------|-----------|
| Piezas Por Caja | 10 pcs | |
| Área Por Caja | 22.5 sq ft | 2.09 sq m |
| Peso Por Caja | 39.18 lbs | 17.77 kg |



Método De Instalación Recomendado

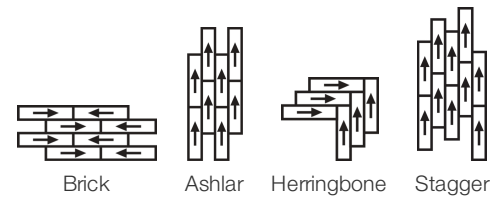

Productos Que Combinan

LVT: Crossing Paths 5.0, In Unison 2.5, Crossing Paths 2.5
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile
Broadloom: Braided Broadloom, Valle Broadloom

desempeño + pruebas

| | |
|--|---|
| resistencia al calor (ASTM F1514) | Passes |
| resistencia a la luz (ASTM F1515) | Passes |
| resistencia a productos químicos (ASTM F925) | Passes |
| panel radiante (ASTM E648) | Passes, Class I |
| coeficiente de fricción (ASTM D2407, resistencia al deslizamiento) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certificado |
| Climate Impact | |
| Environmental Product Declaration (EPD) | Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 11.59 Kg Co ₂ /M ² |
| Total Recycled Content | 20% (Pre-Consumer 20% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin Imported |

WELL V2 Contribution Credit

| | |
|--|---|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | FloorScore Certificate |

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

[Installation Guidelines](#)
[Maintenance Guidelines](#)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore® Certified

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|---|--|--|---|--|--|
|  Eggshell 91111 V2 - Slight Variation |  Spindle 91140 V2 - Slight Variation |  Sandy Dune 91240 V2 - Slight Variation |  Link 91375 V2 - Slight Variation |  Unify 91450 V2 - Slight Variation |  Together 91475 V2 - Slight Variation |
|  Smoky Oak 91516 V2 - Slight Variation |  Caster 91518 V2 - Slight Variation |  Gesso 91520 V2 - Slight Variation |  Include 91680 V2 - Slight Variation |  Merge 91700 V2 - Slight Variation |  Thatch 91720 V2 - Slight Variation |
|  Grove 91737 V2 - Slight Variation |  Summit 91760 V2 - Slight Variation |  Join 91895 V2 - Slight Variation | | | |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

| | | | |
|---|--|---|---|
| V1  | V2  | V3  | V4  |
| Uniform Appearance | Slight Variation | Moderate Variation | Substantial Variation |

