

## Function 2.5


Colección	<b>Function + Flow</b>	
Número De Estilo	<b>4386V</b>	
Construcción	<b>Luxury Vinyl Tile De Uso Comercial</b>	
clase	<b>Class III, Type B</b>	
Terminación	<b>ExoGuard+®</b>	
	U.s.	Metric
Dimensiones Nominales	<b>18 in w x 18 in l</b>	<b>46 cm w x 46 cm l</b>
Dimensiones Reales	<b>18.00 in w x 18.00 in l</b>	<b>45.72 cm w x 45.72 cm l</b>
Desgaste De La Capa De Uso	<b>22 mil (0.022 in)</b>	<b>0.56 mm</b>
Espesor Total Del Producto	<b>0.098 in</b>	<b>2.5 mm</b>
Installation Type	<b>Dry Back</b>	
Instalación	<b>Direct Glue</b>	
Adhesivo Recomendado	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

### Embalaje

Piezas Por Caja	<b>20 pcs</b>	
Área Por Caja	<b>45 sq ft</b>	<b>4.18 sq m</b>
Peso Por Caja	<b>40.15 lbs</b>	<b>18.21 kg</b>



### Método De Instalación Recomendado

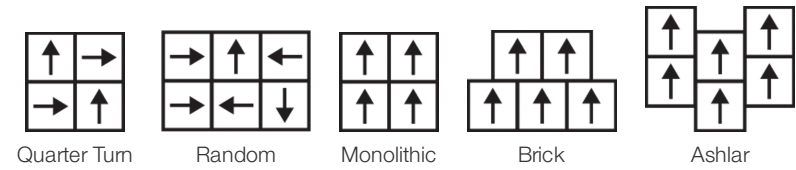

### Productos Que Combinan

LVT: Flow 2.5, Flow 5.0, Function 5.0, Flow 5.0 Lt

desempeño + pruebas

carga estática (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	<b>Passes</b>	
resistencia al calor (ASTM F1514)	<b>Passes</b>	
resistencia a la luz (ASTM F1515)	<b>Passes</b>	
resistencia a productos químicos (ASTM F925)	<b>Passes</b>	
panel radiante (ASTM E648)	<b>Passes, Class I</b>	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

15 Años Limitado A Uso Comercial

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   China

WELL V2 Contribution Credit


X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2018</b>
Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de categoría de producto	<b>FloorScore® Certified</b>

Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.
Maintenance Guidelines	


Available Colorways




Silica 86100  
LRV 57 | L\* 80.17  
V2 - Slight Variation




Uniform 86120  
LRV 36.6 | L\* 67.01  
V2 - Slight Variation



Transition 86501  
LRV 42.4 | L\* 71.15  
V2 - Slight Variation



Pebble 86504  
LRV 39.9 | L\* 69.43  
V2 - Slight Variation



Composite 86506  
LRV 25.9 | L\* 57.91  
V2 - Slight Variation



Blend 86515  
LRV 45.5 | L\* 73.25  
V2 - Slight Variation




Change 86520  
LRV 23.5 | L\* 55.58  
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation