

Function 2.5


Collection	Function + Flow	
Numéro De Style	4386V	
Construction	Carreaux De Vinyle De Luxe Commerciale	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	18 in w x 18 in l	46 cm w x 46 cm l
Dimensions Réelles	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
Épaisseur De La Couche d'Usure	22 mil (0.022 in)	0.56 mm
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	

Emballage

Pièces Par Carton	20 pcs	
Surface Par Carton	45 sq ft	4.18 sq m
Poids Par Carton	40.15 lbs	18.21 kg



Méthodes d'Installation Conseillées

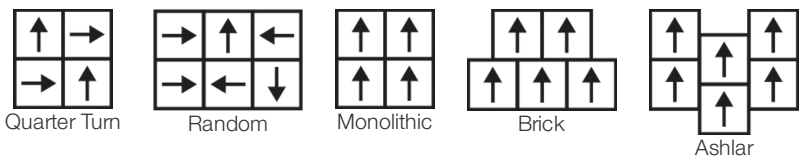

Coordination Des Produits

LVT: Flow 2.5, Flow 5.0, Function 5.0, Flow 5.0 Lit

performance + Tests et essai

charge statique (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
poinçonnement rémanent (ASTM F1914)	Passes	
résistance à la chaleur (ASTM F1514)	Passes	
résistance à la lumière (ASTM F1515)	Passes	
résistance chimique (ASTM F925)	Passes	
Essai au panneau radiant (Astm E648)	Passes, Class I	
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Commercial 15 Year Underbed Bond Warranty](#)
[Limitée Commerciale De 15 Ans](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing	
Indoor Air Quality	FloorScore® Agréé
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018
Embodied Carbon (Cradle to Gate)	9.7 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin Imported


WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt	Absence of Heavy Metals
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt	Absence of Halogenated Flame Retardants
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt	Ortho-Phthalates
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt	FloorScore Certificate

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgateion et optimisation des produits de construction	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018
Crédit EQ : matériaux faibles émissions	FloorScore Certified
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit shawcontract.com/testing for more information.
Maintenance Guidelines	


Available Colorways




Silica 86100
LRV 57 | L* 80.17
V2 - Slight Variation




Uniform 86120
LRV 36.6 | L* 67.01
V2 - Slight Variation



Transition 86501
LRV 42.4 | L* 71.15
V2 - Slight Variation



Pebble 86504
LRV 39.9 | L* 69.43
V2 - Slight Variation



Composite 86506
LRV 25.9 | L* 57.91
V2 - Slight Variation



Blend 86515
LRV 45.5 | L* 73.25
V2 - Slight Variation




Change 86520
LRV 23.5 | L* 55.58
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation

